

Plain diffuser

CRL



Description

CRL is a circular diffuser with an unperforated adjustable face plate. CRL can be used both for supply and exhaust air. The diffuser can be switched between horizontal and vertical supply air, and is therefore suitable for the horizontal supply of cooled air or vertical supply of heated air. Installing a CRL diffuser in a plenum box type MBB can help to achieve a stable airflow to the diffuser as well as realise the potential for individual adjustment. It is also possible to install a damper directly in the diffuser to enable adjustment without a box.

- Suitable for both supply and exhaust air
- Suitable for horizontal or vertical supply air patterns
- A damper can be installed on the diffuser to achieve adjustment

Maintenance


The face plate can be removed to enable cleaning of internal parts or to gain access to the duct or plenum box. The visible parts of the diffuser can be wiped with a damp cloth.

Order code

Product	CRL	-	aaa
Type	CRL		
Connection dim. Ød			
Ød 100-400			

Example: CRL-200

Dimensions

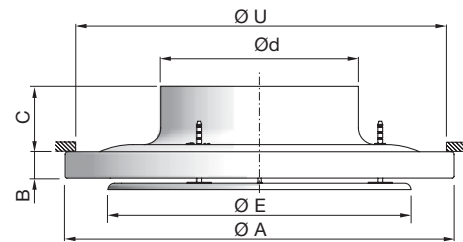


CRL Ød	ØA	B	C	ØE	ØU*	Weight
mm	mm	mm	mm	mm	mm	kg
100	188	15	60	146	170	0.30
125	238	20	65	180	210	0.50
160	288	25	65	220	255	0.60
200	388	28	72	300	355	1.10
250	488	33	82	380	390	1.60
315	588	33	97	490	465	2.50
400	720	40	100	590	670	3.80


ØU = Ceiling grid opening

Dispersal patterns

CRL is supplied with vertical supply air as standard. The dispersal pattern can be changed to horizontal supply air by moving the face plate.

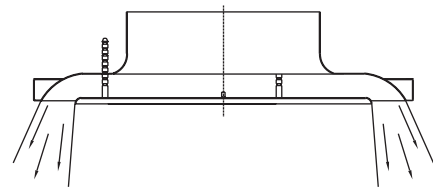

Vertical supply air.

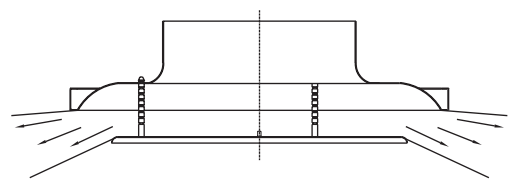

Horizontal supply air.

Materials and finish:

Grille box: Aluminium
 Face plate: Galvanised steel
 Standard finish: Powder-coated
 Standard colour: White RAL 9010, gloss 30


The diffuser is available in other colours. Please contact Lindab's sales department for further information.

Plain diffuser

CRL

Accessories


CAZ - Balancing damper



MBZ - Extension piece



DCZ - Mounting brackets (set)



Order code - accessories

Product _____
 Type _____
 Size _____


aaa bbb

Example: CAZ-125

MBB - Plenum box



CRL + MBB

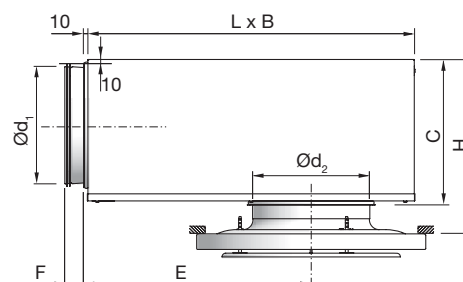

CRL + MBB							
Duct	CRL	B	C	E	F	H*	L
Ød ₁ mm	Ød ₂ mm	mm	mm	mm	mm	mm	mm
100	100	260	159	216	50	175 - 210	310
100	125	260	159	216	50	175 - 205	310
100	160	260	159	216	50	175 - 205	310
125	125	310	184	262	50	200 - 230	376
125	160	310	184	262	50	200 - 230	376
125	200	310	184	262	50	210 - 245	376
160	160	380	220	323	50	235 - 265	459
160	200	380	220	323	50	245 - 280	459
160	250	380	220	323	50	250 - 290	459
200	200	460	259	396	70	285 - 320	565
200	250	460	259	396	70	290 - 332	565
200	315	460	259	396	70	290 - 345	565
250	250	540	309	486	70	340 - 380	698
250	315	540	309	486	70	340 - 395	698
250	400	540	309	486	70	370 - 400	698
315	315	540	373	646	70	405 - 460	858
315	400	540	373	646	70	435 - 465	858

USING CRL + MBB => ALWAYS USE MBZ

* Using accessory MBZ the H dimension will increase:

Ød₂ = 100 - 200 mm => H +40 mm

Ød₂ = 250 - 315 mm => H +60 mm

Ød₂ = 400 mm => H +80 mm

Order code

Product _____
 Type _____
 MBB - aaa - bbb - c

Duct connection Ød₁ _____
 Ø100-315

Diffuser dimension Ød₂ _____
 Ø100-400

Function _____
 S = Supply air
 E = Exhaust

Example: CRL-200+MBB-160-200-S

Plain diffuser

CRL

Technical data

Capacity

Air flow q_v [l/s] and [m³/h], total pressure Δp_t [Pa], throw $l_{0,2}$ [m] and sound power level L_{WA} [dB(A)] can be seen in the diagrams.

Frequency-related sound effect level

The sound effect level in the frequency band is defined as $L_{WA} + K_{ok}$. K_{ok} values are specified in charts beneath the diagrams on the following pages. K_{ok} values for CRL without a box are available on request.

Quick selection, supply air

CRL + MBB		Max. airflow 30dB(A)		Max. airflow 35dB(A)	
Duct $\varnothing d_1$	CRL $\varnothing d_2$	l/s	m ³ /h	l/s	m ³ /h
100	100	26	94	31	112
100	125	35	126	42	151
100	160	42	151	50	180
125	125	46	166	54	194
125	160	58	209	68	245
125	200	62	223	75	270
160	160	67	241	81	292
160	200	86	310	105	378
160	250	96	346	121	436
200	200	107	385	127	457
200	250	135	486	160	576
200	315	146	526	177	637
250	250	151	544	183	659
250	315	161	580	215	774
250	400	185	666	252	907
315	315	206	742	263	947
315	400	227	817	309	1112


Sound attenuation

Sound attenuation of the diffuser ΔL from duct to room, including end reflection, see table below.

CRL + MBB		Centre frequency Hz							
Duct $\varnothing d_1$	CRL $\varnothing d_2$	63	125	250	500	1K	2K	4K	8K
100	100	20	17	7	20	19	20	20	22
100	125	21	16	6	18	19	18	19	21
100	160	21	16	5	15	17	18	18	18
125	125	18	13	7	20	12	19	19	20
125	160	15	14	8	19	12	17	17	19
125	200	14	12	6	16	14	16	17	16
160	160	18	17	10	18	16	18	21	20
160	200	15	14	7	19	17	18	19	19
160	250	15	15	4	15	13	14	16	18
200	200	14	10	7	14	19	16	20	17
200	250	15	9	5	14	19	16	17	16
200	315	13	8	4	11	16	15	16	15
250	250	16	8	7	16	18	18	18	17
250	315	11	7	6	16	17	17	16	16
250	400	15	6	5	10	14	16	15	15
315	315	8	10	9	14	18	18	17	21
315	400	8	8	8	11	16	17	16	19

Throw $l_{0,2}$

The throw is specified at a terminal velocity of 0.2 m/s. Diagram below shows throw $l_{0,2}$ for horizontal supply air.

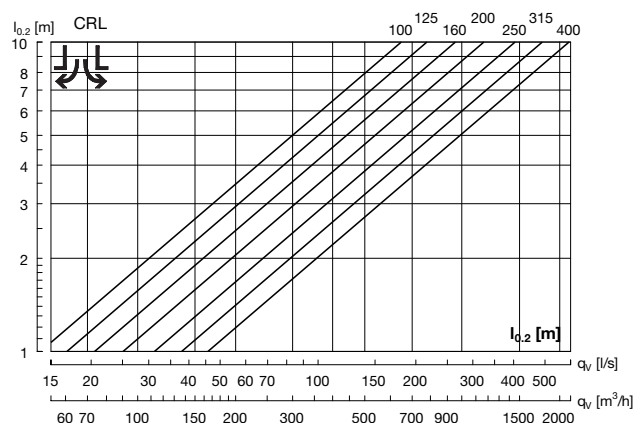

Correction throw $l_{0,2}$ for vertical supply air

CRL $\varnothing d$	Correction factor
100	3,1
125	2,7
160	2,7
200	2,7
250	2,6
315	2,4
400	2,3


Air jet distribution

l_b = Distance from the diffuser to the point where there is maximum dispersal.


b_v = Depth of the air jet on a vertical plane.

b_h = Width of the air jet on a horizontal plane

Horizontal supply air pattern



Vertical supply air pattern

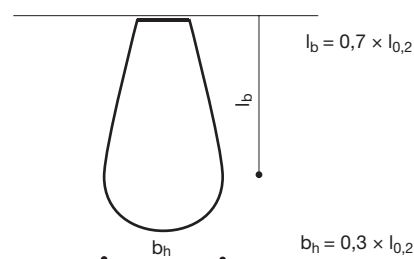




Plain diffuser

CRL

Technical data


Throw $l_{0.2}$ / turning point $l_{0.0}$

Throw $l_{0.2}$ [m] is specified at a speed of 0.2 m/s. Turning point $l_{0.0}$ [m] is specified for +5 K, +10 K respectively.

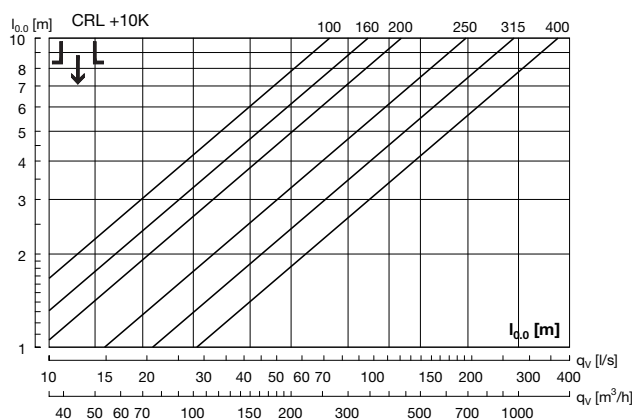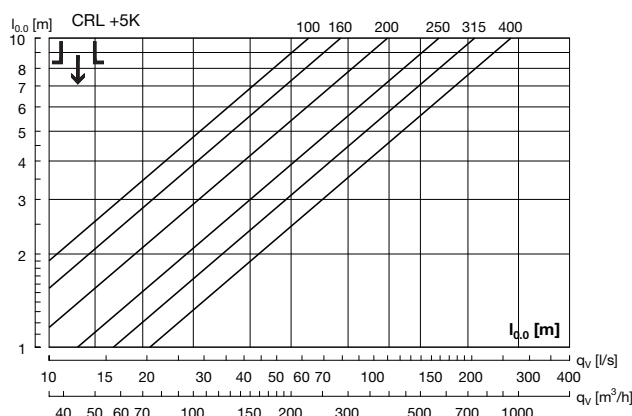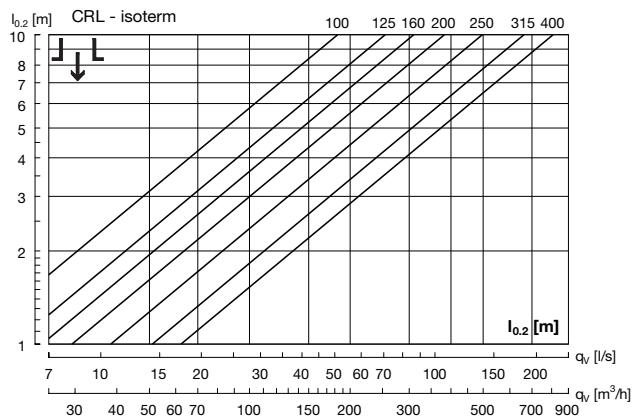


CRL without box - Supply air

Supply air - horizontal

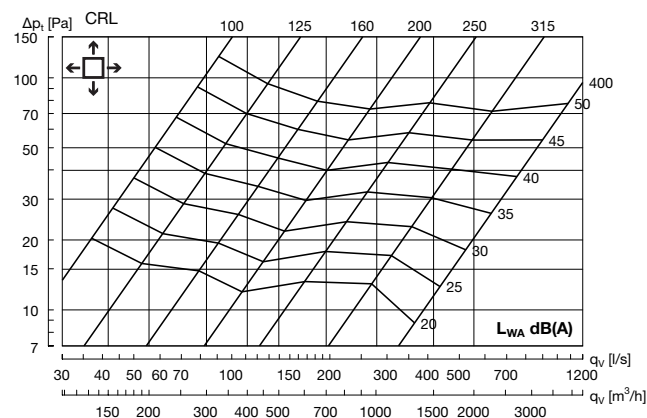

Supply air - vertical

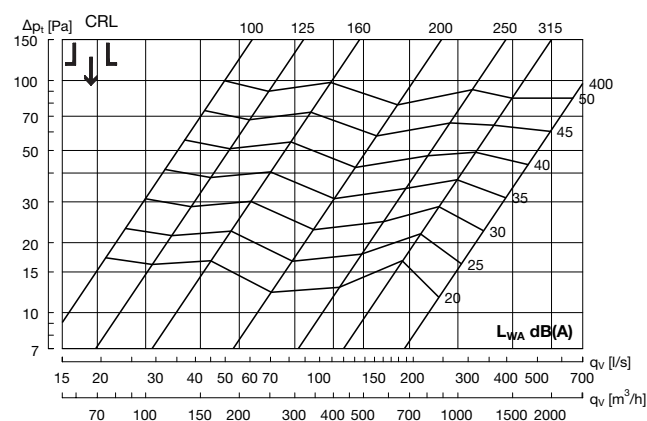


Plain diffuser

CRL


Technical data

CRL 100 + MBB - Supply air

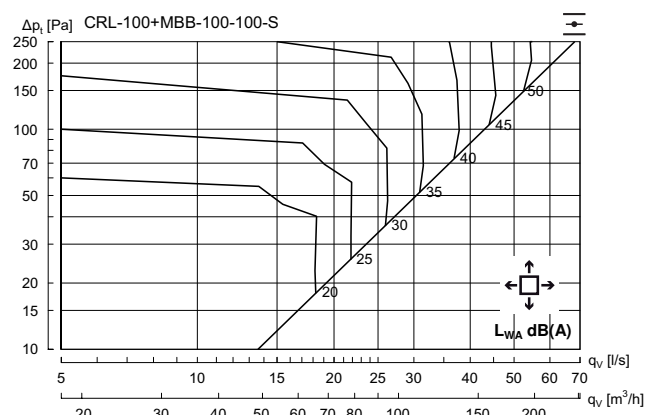


Hz	63	125	250	500	1K	2K	4K	8K
K_{ok}	12	8	5	-7	-8	-14	-17	-22

CRL 125 + MBB - Supply air

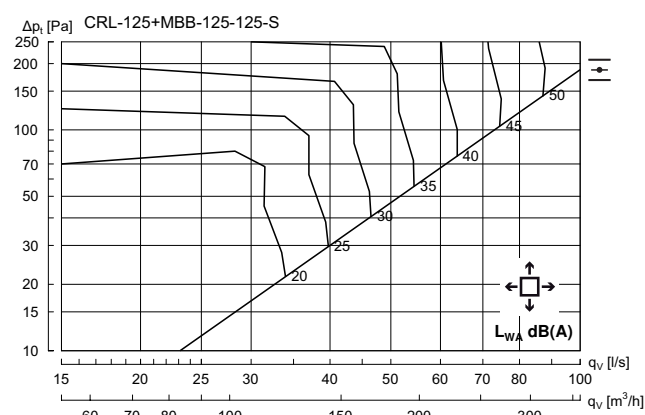

Hz	63	125	250	500	1K	2K	4K	8K
K_{ok}	11	9	3	-5	-6	-14	-20	-24

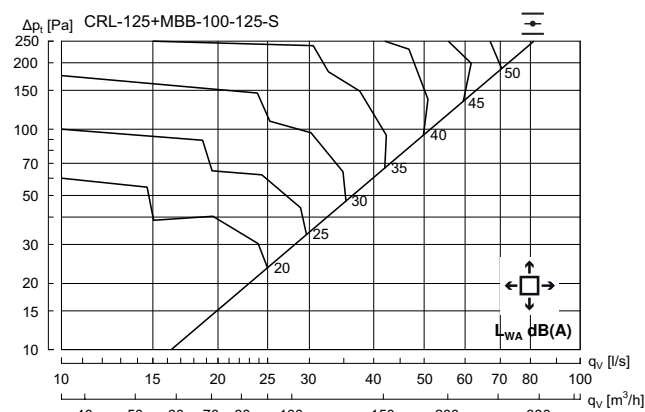


Hz	63	125	250	500	1K	2K	4K	8K
K_{ok}	13	8	3	-5	-7	-11	-15	-19

Plain diffuser


CRL

Technical data


CRL 160 + MBB - Supply air

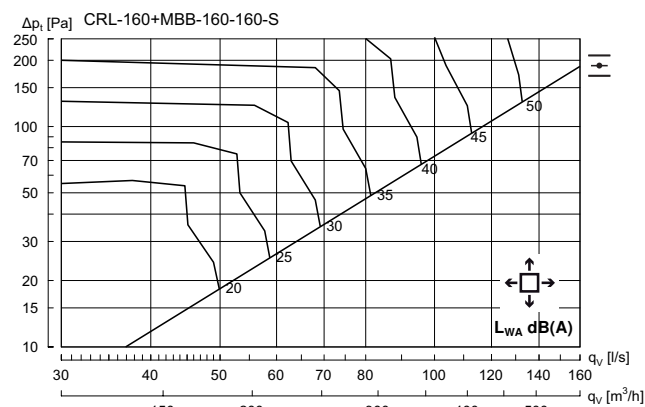

Hz	63	125	250	500	1K	2K	4K	8K
K_{ok}	11	12	3	-7	-7	-15	-20	-23

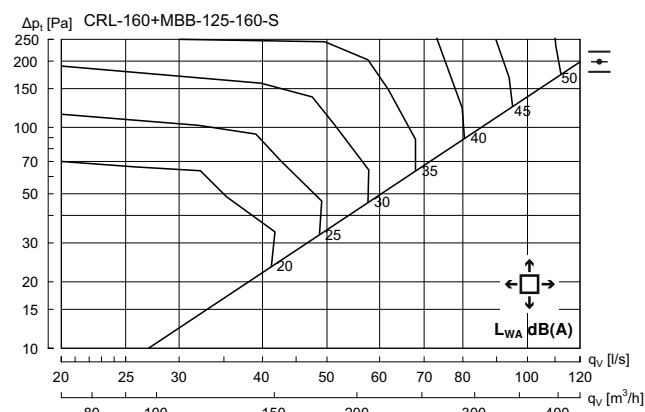


Hz	63	125	250	500	1K	2K	4K	8K
K_{ok}	12	8	3	-5	-6	-11	-17	-22

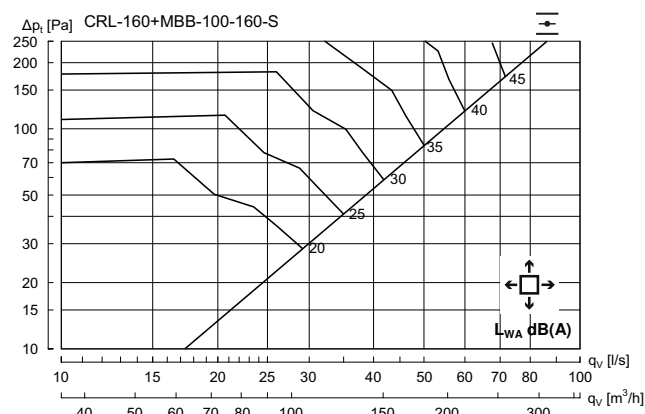


Hz	63	125	250	500	1K	2K	4K	8K
K_{ok}	9	3	1	-3	-5	-9	-15	-19


CRL 200 + MBB - Supply air

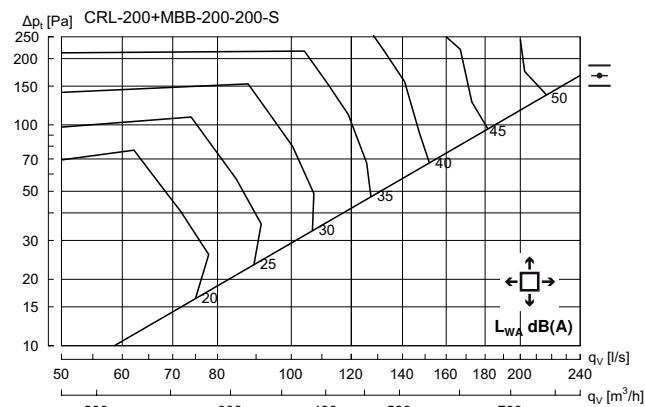

Hz	63	125	250	500	1K	2K	4K	8K
K_{ok}	12	11	1	-3	-7	-15	-20	-24

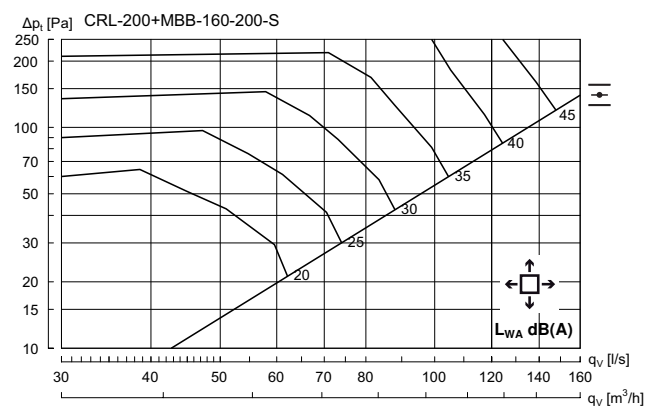

Hz	63	125	250	500	1K	2K	4K	8K
K_{ok}	12	8	1	-4	-5	-10	-18	-22

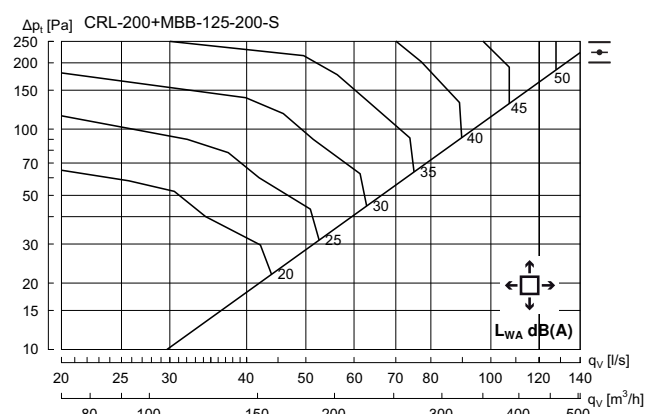


Hz	63	125	250	500	1K	2K	4K	8K
K_{ok}	10	5	1	-4	-5	-10	-16	-20

Plain diffuser


CRL

Technical data


CRL 250+ MBB - Supply air

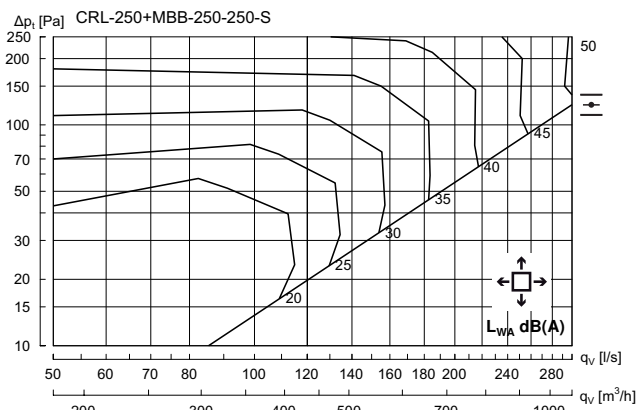

Hz	63	125	250	500	1K	2K	4K	8K
K_{ok}	15	7	0	-2	-6	-12	-16	-21

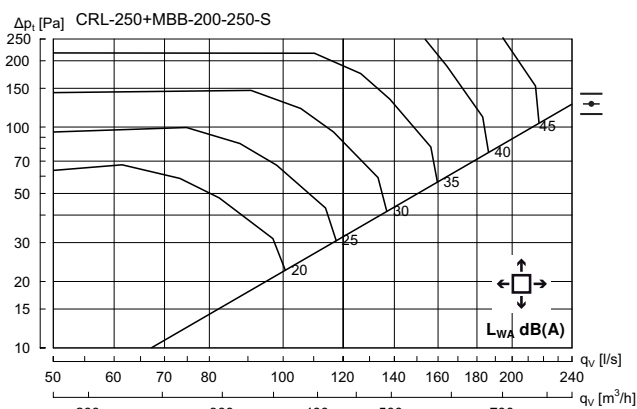


Hz	63	125	250	500	1K	2K	4K	8K
K_{ok}	11	7	-1	-2	-5	-12	-17	-22

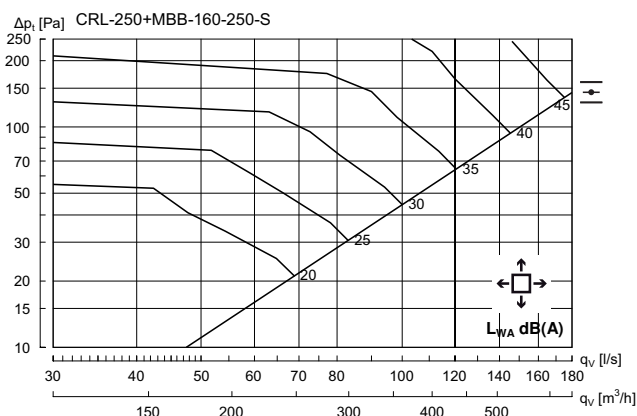


Hz	63	125	250	500	1K	2K	4K	8K
K_{ok}	11	6	1	-3	-5	-10	-15	-21


CRL 315 + MBB - Supply air

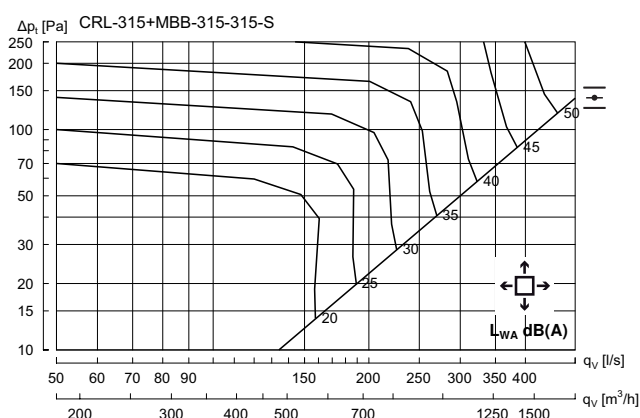

Hz	63	125	250	500	1K	2K	4K	8K
K_{ok}	15	4	1	-2	-6	-13	-17	-16

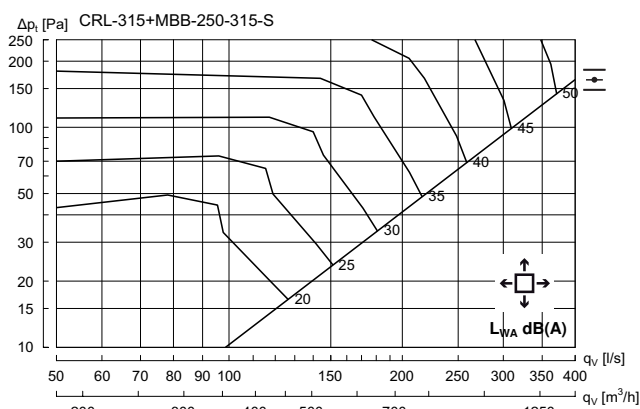

Hz	63	125	250	500	1K	2K	4K	8K
K_{ok}	13	6	-1	-2	-5	-12	-17	-23

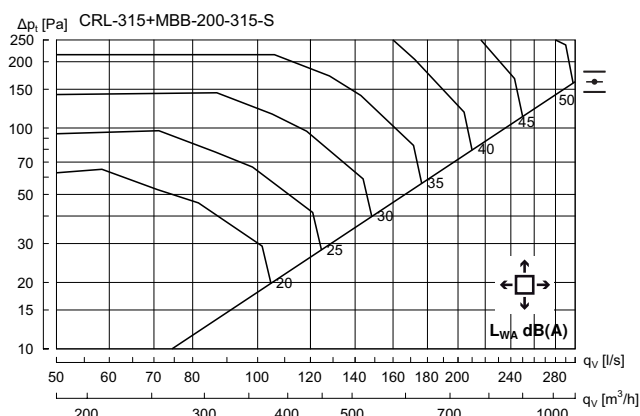


Hz	63	125	250	500	1K	2K	4K	8K
K_{ok}	11	7	0	-3	-6	-10	-16	-21

Plain diffuser


CRL

Technical data

CRL 400+ MBB - Supply air

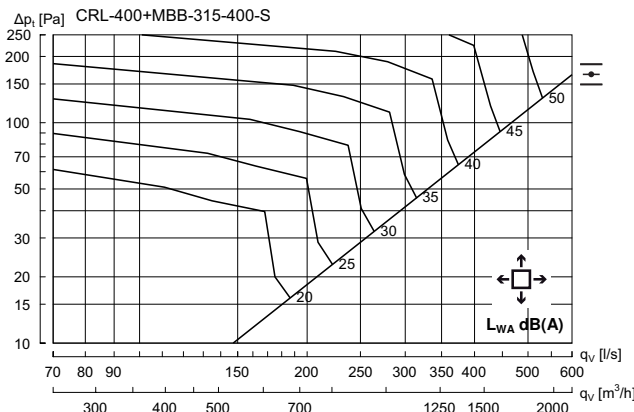

Hz	63	125	250	500	1K	2K	4K	8K
K_{ek}	11	3	0	-3	-5	-10	-14	-23

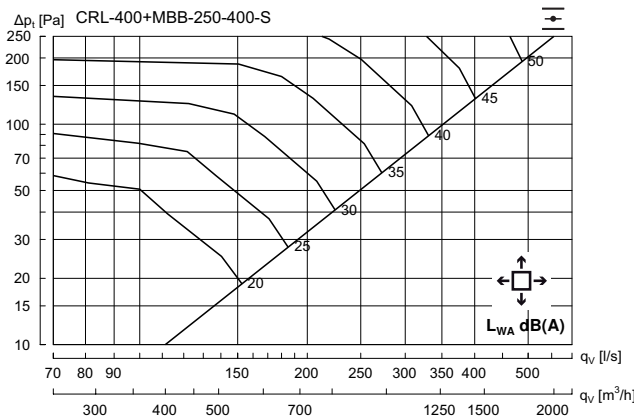

Hz	63	125	250	500	1K	2K	4K	8K
K_{ek}	8	4	-1	-3	-4	-10	-14	-20

CRL + MBB - Supply air

Correction vertical supply air,
sound power level (L_{WA})
and pressure loss (Δp_t)


CRL + MBB		Correction factor	
Duct	CRL	L_{WA}	Δp_t
$\varnothing d_1$	$\varnothing d_2$		
100	100	+ 6	x 1,3
100	125	+ 8	x 1,3
100	160	+ 3	x 1,1
125	125	+ 1	x 1
125	160	+ 8	x 1,2
125	200	+ 1	x 1
160	160	+ 10	x 1,5
160	200	+ 3	x 1,1
160	250	+ 0	x 1
200	200	+ 7	x 1,3
200	250	+ 0	x 1
200	315	+ 1	x 1
250	250	+ -2	x 1
250	315	+ 0	x 1
250	400	+ 0	x 1,1
315	315	+ -2	x 1,1
315	400	+ 3	x 1,2

Plain diffuser


CRL

Technical data

CRL without box - Exhaust air

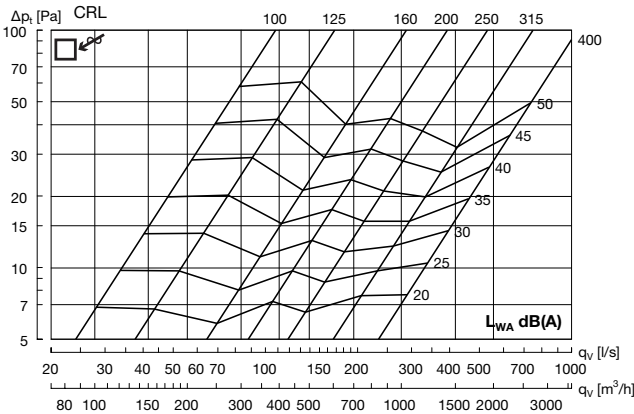

CRL 100 + MBB - Exhaust air

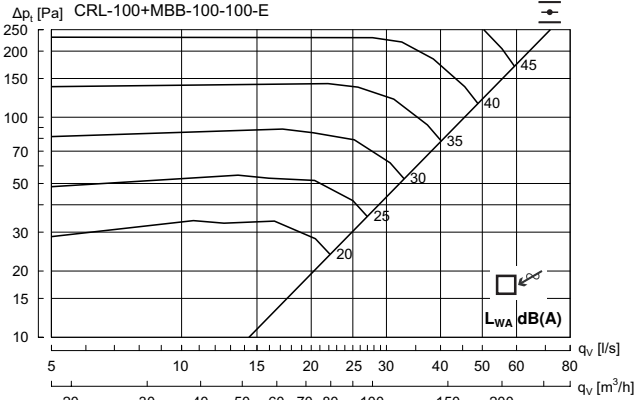


Hz	63	125	250	500	1K	2K	4K	8K
K_{ok}	11	0	2	-2	-6	-11	-15	-22

Plain diffuser


CRL

Technical data

CRL 125 + MBB - Exhaust air

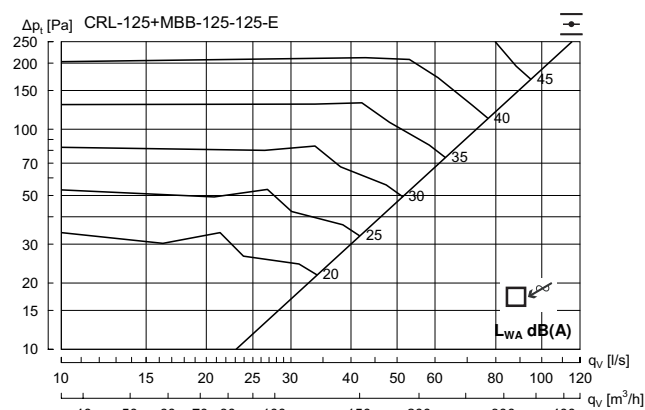


Hz	63	125	250	500	1K	2K	4K	8K
K _{uk}	14	5	-1	-3	-4	-12	-15	-21

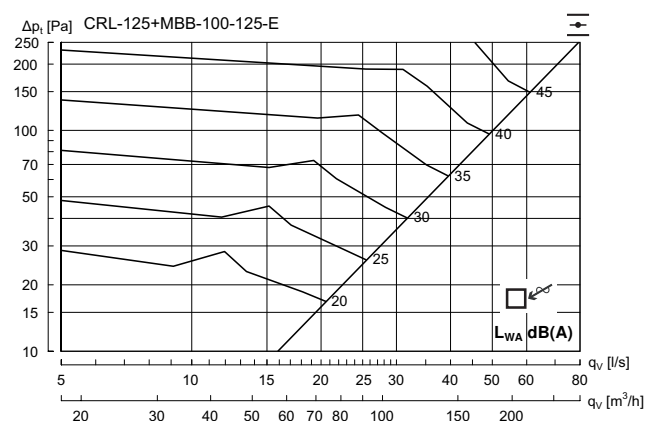


Hz	63	125	250	500	1K	2K	4K	8K
K _{uk}	13	0	4	-3	-8	-11	-17	-22


CRL 160 + MBB - Exhaust air

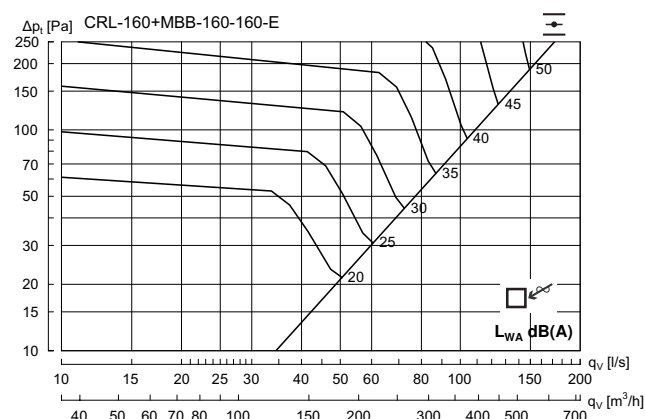

Hz	63	125	250	500	1K	2K	4K	8K
K _{uk}	14	4	-1	-4	-4	-10	-16	-24

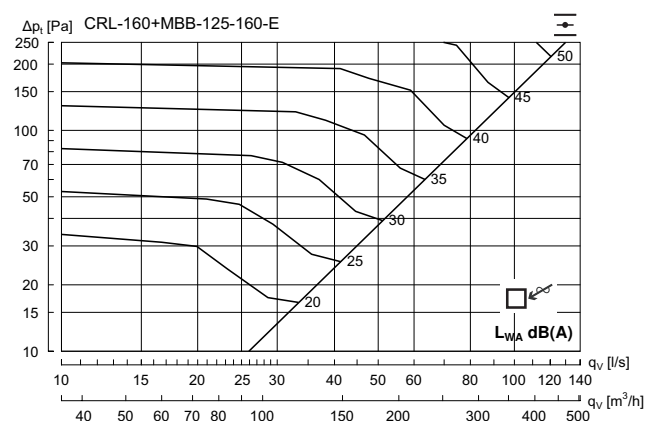

Hz	63	125	250	500	1K	2K	4K	8K
K _{uk}	13	6	1	-3	-5	-12	-15	-21

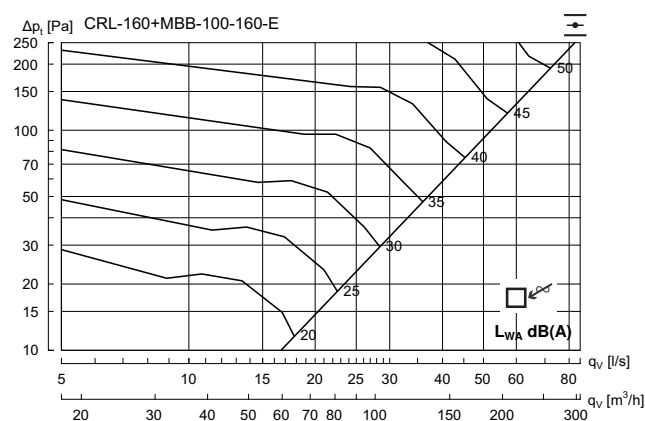


Hz	63	125	250	500	1K	2K	4K	8K
K _{uk}	13	0	5	-3	-9	-12	-19	-23

Plain diffuser


CRL

Technical data


CRL 200 + MBB - Exhaust air

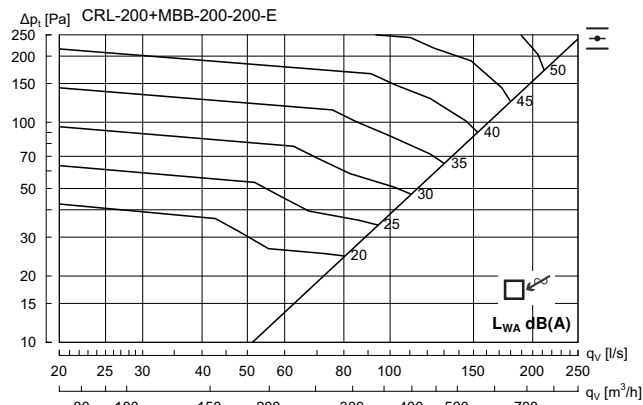

H _z	63	125	250	500	1K	2K	4K	8K
K _{ok}	15	5	-1	-3	-6	-9	-16	-25

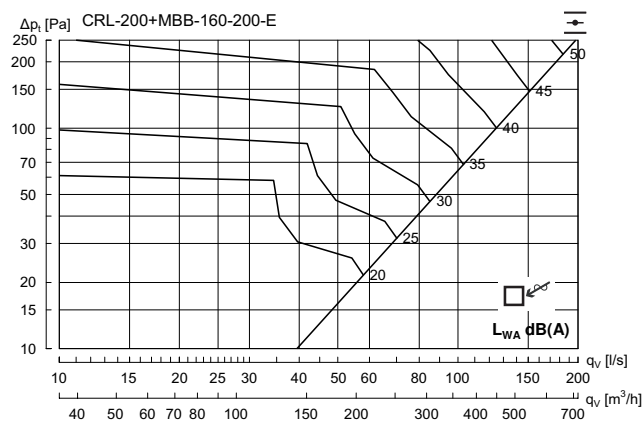


H _z	63	125	250	500	1K	2K	4K	8K
K _{ok}	14	5	0	-3	-5	-9	-15	-20

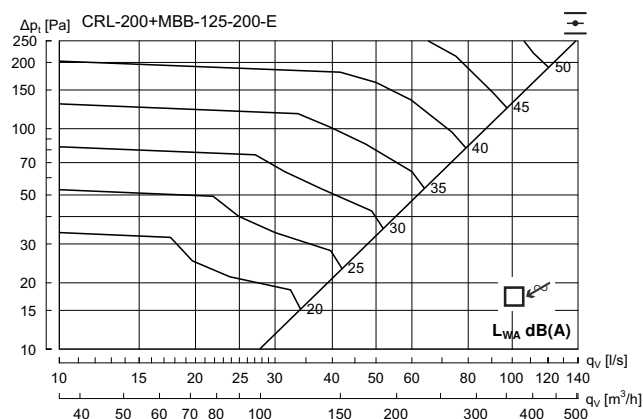


H _z	63	125	250	500	1K	2K	4K	8K
K _{ok}	9	2	1	-2	-5	-9	-14	-19


CRL 250 + MBB - Exhaust air

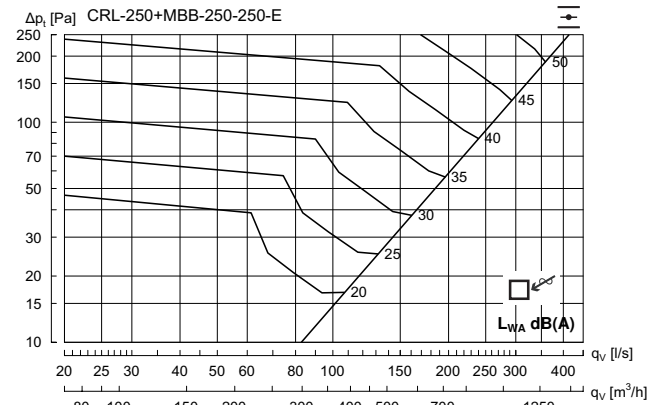

H _z	63	125	250	500	1K	2K	4K	8K
K _{ok}	11	6	2	-2	-7	-11	-15	-24

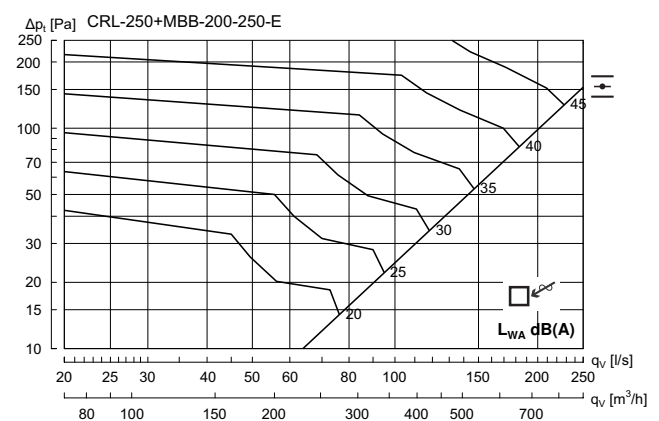

H _z	63	125	250	500	1K	2K	4K	8K
K _{ok}	13	5	1	-3	-6	-10	-13	-22

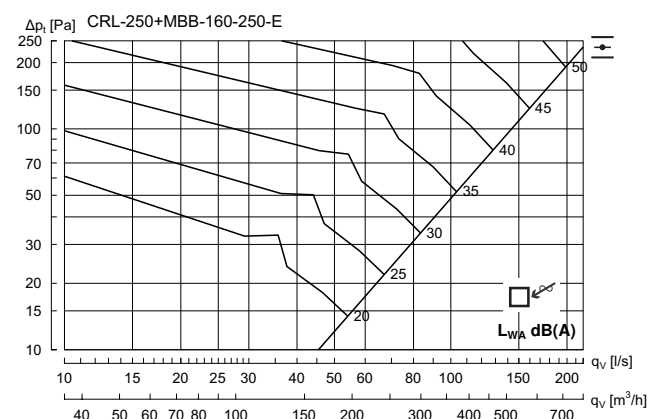


H _z	63	125	250	500	1K	2K	4K	8K
K _{ok}	13	5	1	-3	-5	-11	-14	-20

Plain diffuser


CRL

Technical data


CRL 315 + MBB - Exhaust air

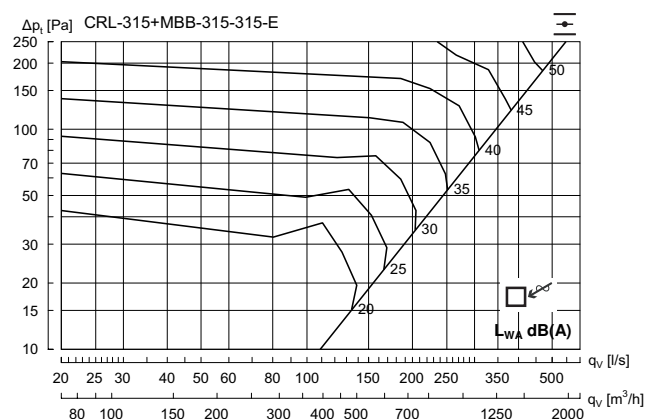

Hz	63	125	250	500	1K	2K	4K	8K
K_{ok}	13	5	2	-3	-6	-10	-15	-25

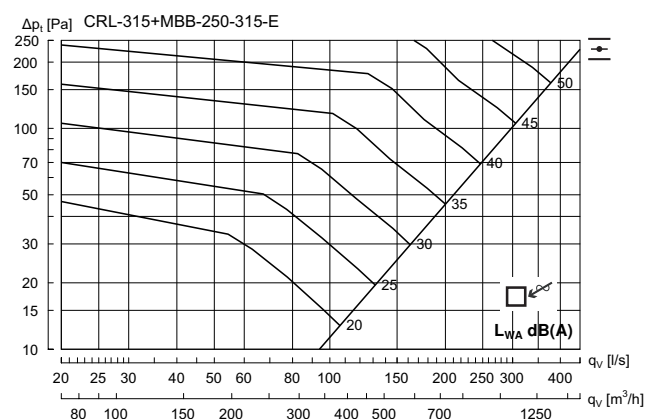


Hz	63	125	250	500	1K	2K	4K	8K
K_{ok}	9	5	2	-3	-6	-10	-16	-22

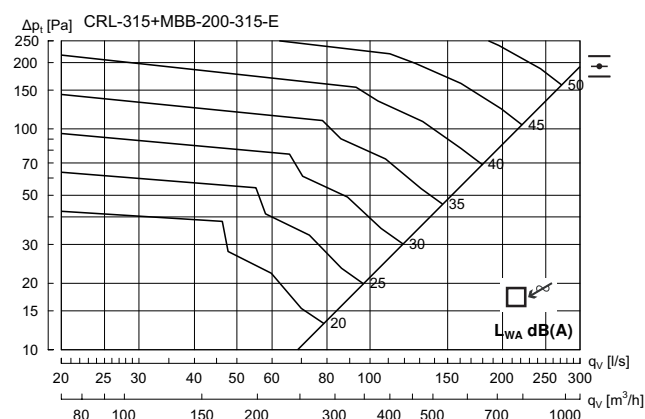


Hz	63	125	250	500	1K	2K	4K	8K
K_{ok}	13	5	0	-3	-5	-10	-15	-22

CRL 400 + MBB - Exhaust air

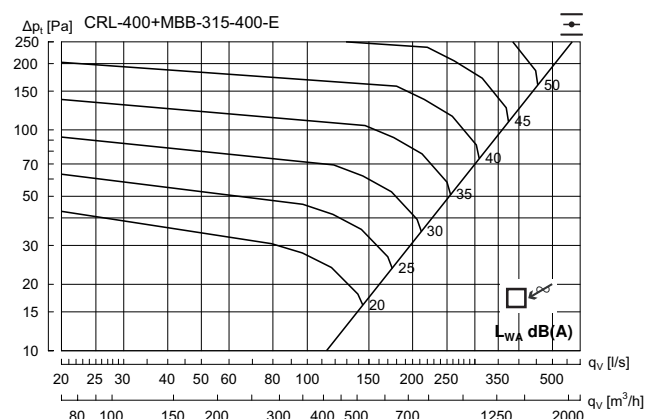

Hz	63	125	250	500	1K	2K	4K	8K
K_{ok}	11	5	2	-2	-7	-11	-15	-25

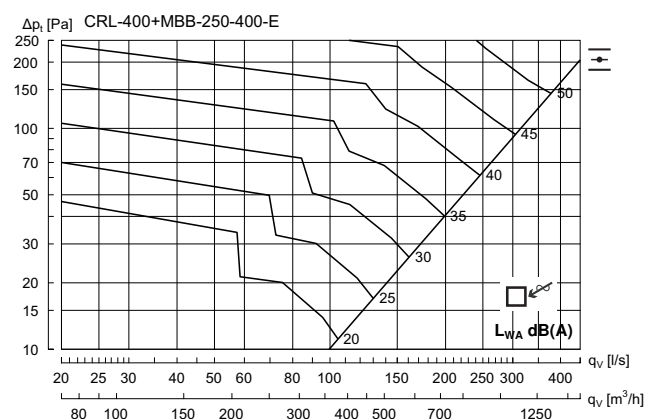

Hz	63	125	250	500	1K	2K	4K	8K
K_{ok}	9	6	2	-2	-6	-12	-16	-24