



T-rør

TCUI/TCPUI

TCUI



TCPUI




Beskrivelse

Isolerede T-rør.

Bestilling

	TCUI	25	250	200
Produkt				
Isolering 25/50				
Dimension Ød_1				
Dimension Ød_3				

Dimensioner

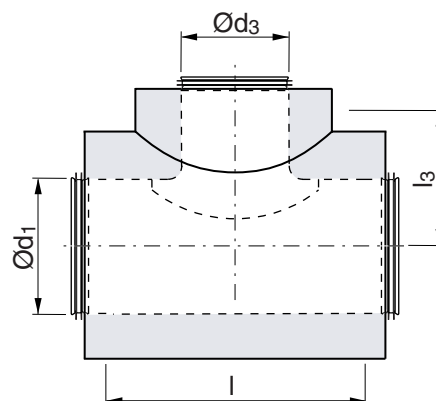

25 mm isolering

Ød_1 nom	Ød_3 nom		l mm	l_3 mm	m kg
100	100	*	260	95	1,80
100	125		280	125	1,90
100	150		330	140	2,10
125	100	*	260	110	1,90
125	125	*	285	115	2,40
125	150		330	155	2,60
150	100	*	260	120	2,30
150	125	*	285	125	2,70
150	150	*	281	125	3,00
150	200		380	165	3,80
200	100	*	255	145	3,30
200	125	*	306	150	3,50
200	150	*	306	150	3,60
200	200	*	307	150	4,70
200	250		450	200	5,80
250	100	*	255	170	4,10
250	125	*	306	175	4,60
250	150	*	306	175	5,10
250	200	*	350	175	6,10
250	250		450	225	7,00
250	300		525	235	8,10
250	355		570	235	9,20
300	100	*	255	198	5,00
300	125	*	306	203	5,60
300	150	*	306	203	5,80
300	200	*	350	203	6,90
300	250		450	255	7,80
300	300		525	265	9,50
300	355		570	265	10,9
355	100		250	250	6,10



T-rør

TCUI/TCPUI

Ød ₁ nom	Ød ₃ nom		l mm	l ₃ mm	m kg
355	125		280	250	6,50
355	150	*	300	225	6,80
355	200	*	350	225	8,00
355	250		450	275	9,10
355	300		525	285	10,6
355	355		570	285	12,8
355	400		620	285	13,1
400	100		250	275	7,70
400	125		280	275	8,10
400	150		330	290	8,60
400	200	*	350	250	9,60
400	250		450	300	11,3
400	300		525	310	12,4
400	355		570	310	14,0
400	400		620	310	14,6
400	450		680	315	16,8
450	100		250	300	9,40
450	125		280	300	9,60
450	150		330	315	10,2
450	200	*	350	275	11,3
450	250		450	325	13,1
450	300		525	335	14,1
450	355		570	335	16,1
450	400		620	335	16,6
450	450		680	340	17,8
450	500		740	340	20,8
500	100		250	345	10,2
500	125		280	345	10,7
500	150		330	345	11,1
500	200	*	400	305	12,2
500	250		450	355	14,8
500	300		525	365	16,8
500	355		570	365	18,2
500	400		620	365	18,5
500	450		680	370	19,7
500	500		740	370	21,2

* Udvendigt T-stykke med presset afgrening type PS (TCPUI), øvrige udført som TSTC (TCUI).

50 mm isolering

Ød ₁ nom	Ød ₃ nom		l mm	l ₃ mm	m kg
100	100	*	281	125	2,60
100	125		355	165	2,90
100	150		380	165	3,00
125	100	*	346	137	2,90
125	125	*	346	137	3,40
125	150		380	180	4,00
150	100	*	306	150	3,50
150	125	*	350	150	3,70
150	150	*	307	150	4,10
150	200		450	200	5,20
200	100	*	306	175	4,80
200	125	*	350	175	5,00
200	150	*	350	175	5,40
200	200		450	225	6,50
200	250		525	235	7,60
250	100	*	306	203	5,50
250	125	*	350	203	5,90
250	150	*	350	203	6,20
250	200		450	255	7,20
250	250		525	265	9,40
250	300		570	265	9,90
250	355		620	265	11,1
300	100	*	300	225	6,70
300	125	*	350	225	7,20
300	150	*	350	225	7,80
300	200		450	275	9,50
300	250		525	285	11,1
300	300		570	285	12,4
300	355		620	285	12,9
355	100	*	300	250	8,10
355	125	*	350	250	8,30
355	150	*	350	250	9,10
355	200		450	300	10,8
355	250		525	310	12,2
355	300		570	310	13,4
355	355		620	310	15,1
355	400		680	315	16,4
400	100	*	300	275	9,40
400	125		355	315	10,2
400	150		380	315	10,8
400	200		450	325	12,3
400	250		525	335	13,8
400	300		570	335	15,2



T-rør

TCUI/TCPIUI

Ød ₁ nom	Ød ₃ nom		l mm	l ₃ mm	m kg
400	355		620	335	17,2
400	400		680	340	18,7
400	450		740	340	19,8
450	100	*	360	305	10,9
450	125		355	345	11,8
450	150		380	345	12,1
450	200		450	355	14,2
450	250		525	365	16,2
450	300		570	365	17,4
450	355		620	365	19,5
450	400		680	370	20,3
450	450		740	370	22,9
450	500		780	370	23,7
500	100	*	360	325	11,8
500	125		355	365	12,8
500	150		380	365	12,9
500	200		450	375	15,1
500	250		525	385	17,6
500	300		570	385	18,5
500	355		620	385	23,1
500	400		680	390	24,8
500	450		740	390	26,3
500	500		780	390	27,6

* Udvendigt T-stykke med presset afgrening type PS (TCPUI), øvrige udført som TSTC (TCUI).

1

2

3

4

5

6

7

8

9

10

11

12

13

14

15

16

17

18