

B.E.G.**LUXOMAT®**

LC-Click-N 140

Prod.No. 91021 EAN: 4007529910212

- Voltage: 110 – 240 V AC 50 / 60 Hz
- Dimensions: 103 x 78 x 80 mm
- Power consumption: approx. 0.4 W

Areas of application

- outdoor areas (entrances/access roads)
- parking areas
- underground car parks

Order data

Designation	Colour	Art.No
LC-Click-N 140	black	91021

Accessories

Designation	Colour	Art.No
Wire basket BSK (Ø 164 x 143 mm)	white	92467
RC-Arc extinction kit	white	10880
Mini-RC-Arc extinction kit		10882

Technical data

Voltage:	110 – 240 V AC 50 / 60 Hz
Dimensions:	103 x 78 x 80 mm
Power consumption:	approx. 0.4 W
Detection area:	horizontal 140° (Wall mounting) max. 12 m across max. 4 m towards
Range:	max. 2 m anti- creep protection
Monitored area (tangential movement):	170 m² / 2.5 m mounting height
Mounting height min./max./recommended:	2 m / 3 m / 2.5 m
Degree / class of protection:	IP54 / Class II
Impact strength:	IK04
Ambient temperature:	-25 °C to +50 °C
Housing:	polycarbonate, UV-resistant
Material color:	black mat, similar to RAL9005
Channel 1 (lighting control)	
	1000 W, $\cos \varphi =$ 1
Switching power:	500 VA, $\cos \varphi =$ 0.5 200 W LED
Type of contact (k):	1x μ -contact, NO contact
Follow-up time:	4 sec – 20 min
Switch-on threshold:	2 – 500 Lux

Product information

Motion detector with 140° detection area and 180° anti-creep zone

Adjustable ball head

Detection area can be restricted with blinds

Zero crossing switching




Simple mounting thanks to plug base

Cable entry possible from above, from below and from behind

Can be mounted on standard flush-mount boxes

Application examples:

outdoor areas (entrances/access roads), parking areas,
underground car parks

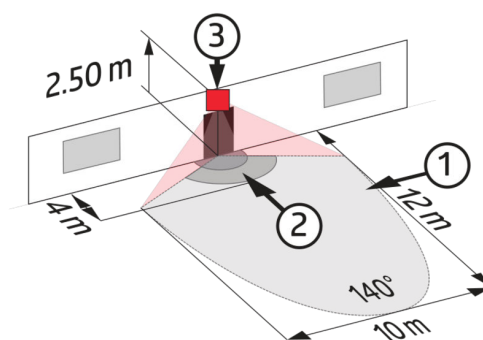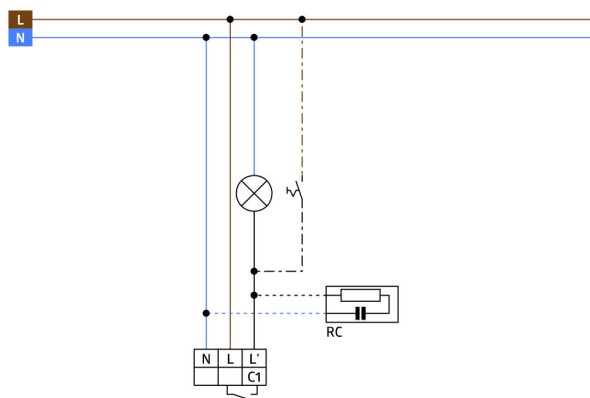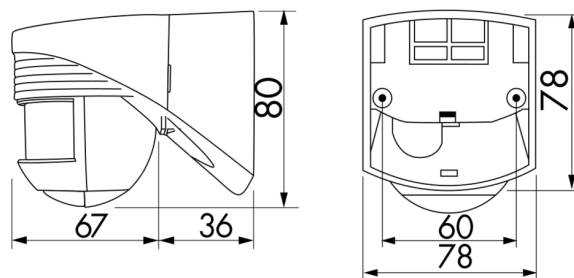

Order data

Designation	Colour	Art.No	EAN
LC-Click-N-200-91022	black	91022	4007529910229
LC-Click-N-140-91001	white	91001	4007529910014
LC-Click-140-91121	black	91121	4007529911219

Accessories



Wire basket BSK (Ø 164 x 143 mm)
Art.No: 92467

Dimensions: Ø 164 x 143 mm
Impact strength: IK09
Housing: coated steel basket



RC-Arc extinction kit
Art.No: 10880

Voltage: 230 V AC ±10%
Dimensions: 38 x 12 x 26 mm
Degree / class of protection: IP20 / Class II



Mini-RC-Arc extinction kit
Art.No: 10882

Voltage: 230 V AC ±10%
Dimensions: 50 x 23 x 8 mm
Degree / class of protection: IP20 / Class II