

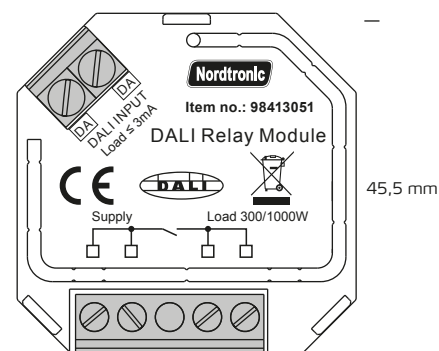


Box relay Dali

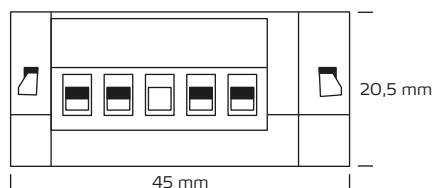

DALI signal input

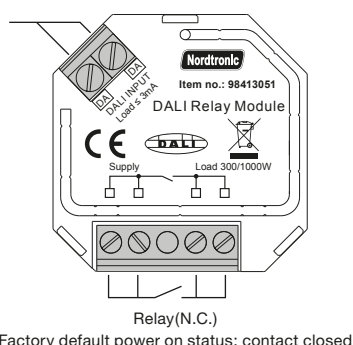

Input		
DALI control input	DALI consumption	Number of DALI addresses
1	< 3mA	1


Output, relay			
Switching voltage AC	Switching voltage DC	Current	Type of contact
Max. 250V	Max. 30V	Resistive load: max. 5A Capacitive load: max. 1.5A Inductive load: max. 5A	1 changeover

Compatible Load Types		
Load symbol	Load type	Maximum load
	Resistive loads Conventional incandescent and halogen light sources	1000W @ 230VAC 500W @ 110VAC
	Capacitive loads Fluorescent tube lamp (compact / with electronic ballast), electronic transformer, LED	300W @ 230VAC 150W @ 110VAC
	Inductive loads Ferromagnetic transformers	1000W @ 230VAC 500W @ 110VAC

Wiring diagram


1. Switching of 100-240VAC load

DALI PS

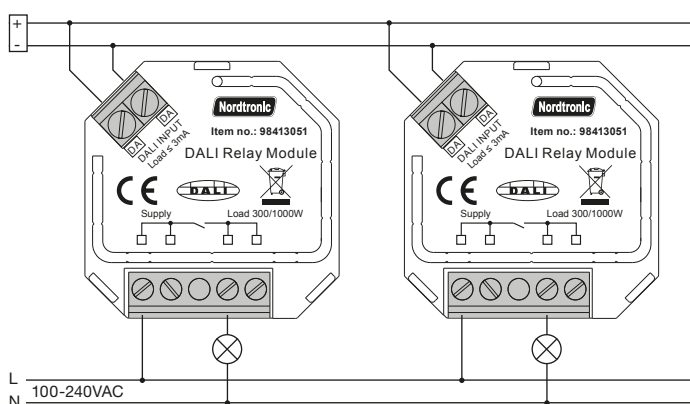

2. Switching of 12/24VDC load

DALI PS

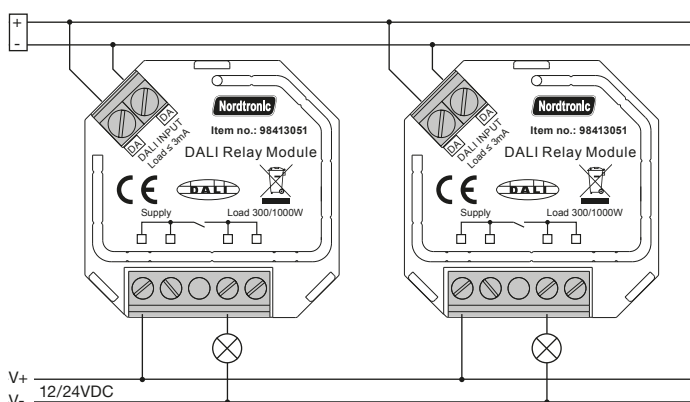

Operation

Setting DALI Address

1 DALI address can be assigned by DALI Master controller automatically, please refer to user manuals of compatible DALI Masters for specific operations.

