

Presence detector
353-701021




Ø 76 mm

4 year warranty

- EN
- Presence detector P41LR, 230 V, secondary, 32-37 m, 360°, SnapFit, for flush mounting
- NL
- Aanwezigheidsmelder P41LR, 230 V, secundair, 32-37 m, 360°, SnapFit, voor inbouw
- FR
- Détecteur de présence P41LR, 230 V, secondaire, 32-37 m, 360°, SnapFit, à encastrer
- DE
- Präsenzmelder P41LR, 230 V, Sekundär, 32-37 m, 360°, SnapFit, für Deckeneinbau
- DK
- Tilstedeværelsessensor P41LR, 230 V, sekundær, 32-37 m, 360°, SnapFit, planforsænket
- SE
- Närvarosensor P41LR, 230 V, sekundär, 32-37 m, 360°, SnapFit, för infälld montering
- NO
- Tilstedeværelsessensor P41LR, 230 V, sekundær, 32-37 m, 360°, SnapFit, til innfelt montering
- IT
- Rilevatore di presenza P41LR, 230 V, secondario, 32-37 m, 360°, SnapFit, per montaggio a incasso
- PL
- Czujnik obecności P41LR, 230 V, podrzędny, 32-37 m, 360°, SnapFit, do montażu podtynkowego
- SK
- Detektor prítomnosti P41LR, 230 V, podržný, 32-37 m, 360°, SnapFit, na zapustenú montáž

Wiring


Aansluitschema / Schéma de raccordement / Verdrahtung / Tilslutningsskema / Kopplingsschema /
Ledningstilkopling / Cablaggio / Okablowanie / Inštalácia

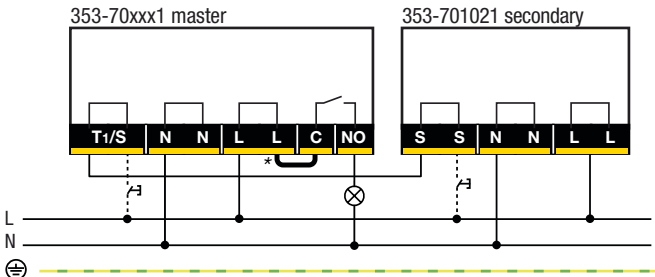

* remove if you want to use the contact as a dry contact (potential-free)

Dimensions


Åfmetingen / Dimensions / Abmessungen / Dimensioner / Mått / Dimensioner / Dimensioni / Wymiary / Rozmery

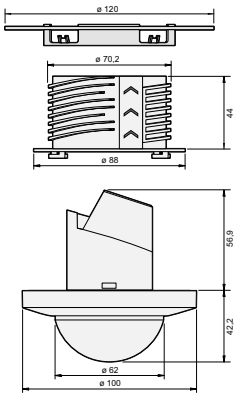


Installation

⚠ 230 V – OFF

Installatie / Installation / Installation / Installation / Installation / Installasjon / Installazione / Instalacja / Inštalácia

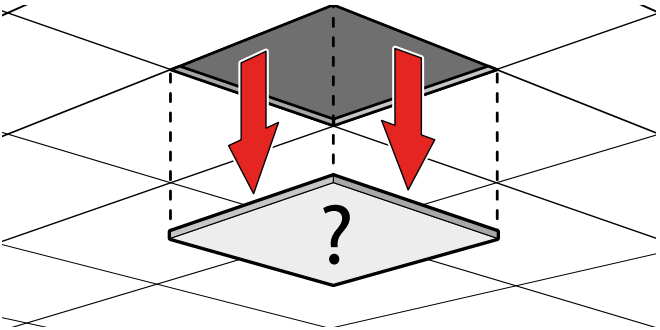

- 1
- NOT REMOVABLE
(fixed ceiling)
- Ø 76 mm
- 2
- 9,5 - 40 mm
- OR
- REMOVABLE
(suspended ceiling)
- Ø 76 mm
- 9,5 - 40 mm
- OR

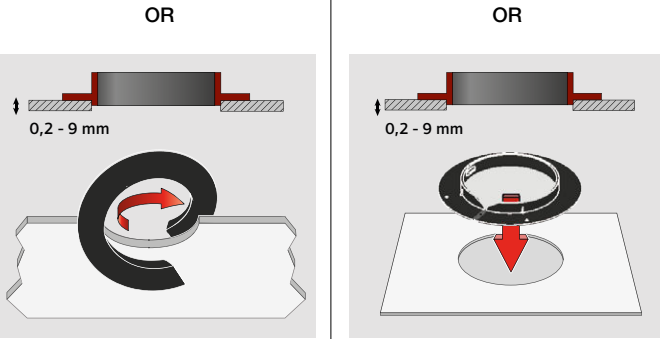

- 3
- a
- 45 - 55 mm
- 10 - 12 mm
- b

- 4
- a
- b
- c
- d
- CLICK
- 5
- a
- b
- * optional

App settings

⚠ 230 V – ON

App-instellingen / Réglages de l'appli / App-Einstellungen / App indstillinger / Appnställningar / App-innstillinger /
Impostazioni dell'app/ Ustawienia aplikacji / Nastavenia aplikácie

	Sensitivity
Factory Settings	High



LED behaviour

⚠ 230 V – ON

Ledgedrag / Comportement des LED / LED-Verhalten / LED funktioner / LED-funktioner / LED-funksjon /
Comportamento del LED / Zachowanie LED / LED signalizácia

EN			
Green LED continuous on	●	Connection OK	Wait More info -->
Green LED flashing	●	Warming up	
Red LED continuous on	●	Error	
Blue LED flashing	●	Walk test active	

NL

Groene led brandt	●	Verbinding OK	
Groene led knippert	●	Warmt op	Even geduld
Rode led brandt	●	Fout	Meer informatie -->
Blauwe led knippert	●	Wandeltest geactiveerd	

FR

LED verte allumée en continu	●	Connexion OK	
LED verte clignote	●	Chauffe	Attendez
LED rouge allumée en continu	●	Erreur	Plus d'info -->
LED bleue clignote	●	Test de mouvement actif	

DE

Grüne LED leuchtet	●	Verbindung OK	
Grüne LED blinkt	●	Aufwärmen	Warten
Rote LED leuchtet	●	Fehler	Mehr Info -->
Blaue LED blinkt	●	Bewegungstest aktiv	

DK

Grøn LED lyser konstant	●	Forbindelse OK	
Grøn LED blinker hurtigt	●	Varmer op	Vent
Rød LED lyser konstant	●	Fejl	Mere info -->
Blå LED blinker hurtigt	●	Gå-test aktiv	

SE

Grøn LED kontinuerligt på	●	Anslutning OK	
Grøn LED blinkar	●	Värmer upp	Vänta
Röd LED kontinuerligt på	●	Fel	Mer information -->
Blå LED blinkar	●	Promenadtest aktivt	

NO

Grønn lysdiode kontinuerlig på	●	Tilkopling OK	
Grønn lysdiode blinker	●	Varmes opp	Vent
Rød lysdiode kontinuerlig på	●	Feil	Mer info -->
Blå lysdiode blinker	●	Funksjonstest virksom	

