


## Exhaust fans BVBV series

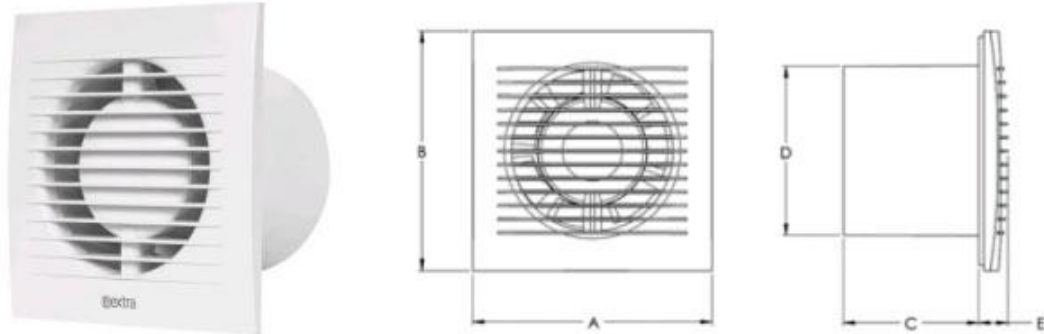

### Description

Exhaust fans for wall mounting of premises.

### Technical data

#### Construction

Manufactured from plastic.

Fan: axial.

Type of bearing: slide bearing.

Motor protection class: IPX4.

Insulation class: class B.

#### Installation

Mounting with all type round ducts: sheet metal, flexible aluminum, plastic or fabric.

Mounting positions: vertical

Location: indoors.

#### Power supply

230V-50Hz single phase.

#### Temperature range

+5°C to +40°C



#### Sizes

100 and 125 mm

Dimensions [mm]					
Type	A	B	C	D	E
BVBV100	140	140	80	99	16
BVBV125	165	165	80	124	16

## Technical data

Type	Voltage [V-Hz]	Power [W]	IP	Speed [rpm]	Air flow [m <sup>3</sup> /h]	Noise level at 1m [dB(A)]	Temperature min/max [°C]	Weight [kg]
BVBV100	230V-50Hz	15	IPX4	2550	100	32	+5/+40	0,37
BVBV125	230V-50Hz	16	IPX4	2360	150	36	+5/+40	0,44

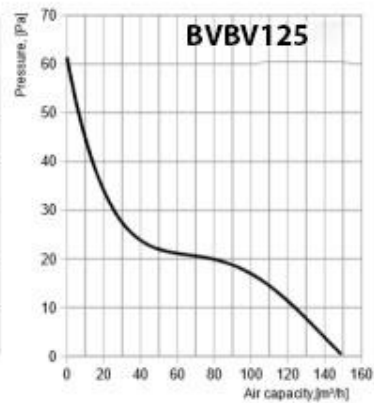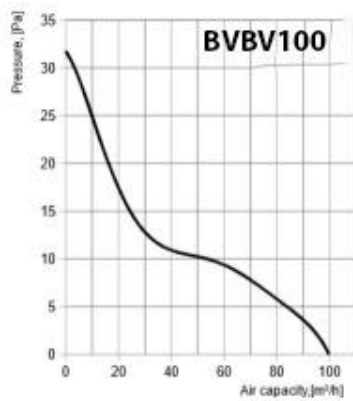

## Modifications

BVBVxxxT – fan is equipped with a timer function.

BVBVxxxHT – fan is equipped with a humidity level control function.

BVBVxxxWP – fan that is equipped with a switch and cable.

