


Exhaust fans

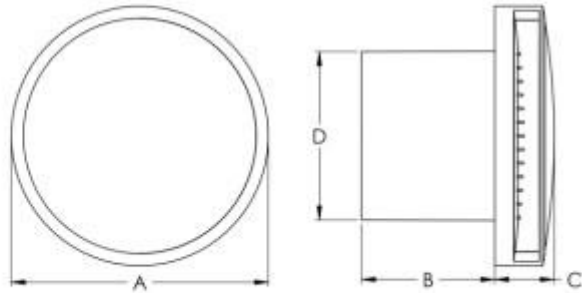

Description

Exhaust fans for wall or ceiling mounting of premises.

Construction

Manufactured from plastic

Fan: axial

Typ of bearing: ball bearing

Motor protection class: IPX4

Installation

Mounting with all type round ducts: sheet metal, flexible aluminum, plastic or fabric

Mounting positions: multiple

Location: indoors

Power supply

230V-50Hz single phase

Temperature range

+5°C to +40°C

Sizes

100 and 125 mm

Dimensions [mm]				
Type	A	B	C	D
BVV100C	152	80	35	99
BBV125C	178	80	35	124

Technical data

Type	Voltage [V-Hz]	Power [W]	IP	Speed [rpm]	Air flow [m3/h]	Noise level: 3m distance Lp A dB(A)	Temperature min/max [°C]	Weight [kg]
BVV100C	230V- 50Hz	15	IPX4	2550	100	32	+5/+40	0,42
BVV125C	230V- 50Hz	16	IPX4	2360	150	36	+5/+40	0,49

