


Duct fans BVIR series

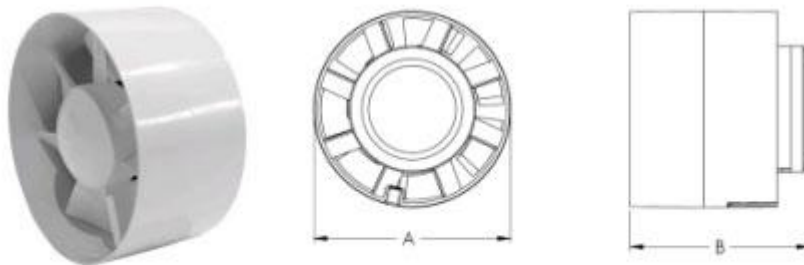

Description

Duct fans for low pressure duct systems of premises.

Construction

Manufactured from plastic.

Fan: axial.

Type of bearing: slide bearing.

Motor protection class: IPX4.

insulation class: class B.

Installation

Mounting with all type of round ducts: sheet metal, flexible aluminum, plastic, or fabric.

Mounting positions: horizontal.

location: indoors.

Power supply

230V-50Hz single phase

Temperature range

+5°C to +40°C


Size

100 and 125 mm

Dimensions [mm]		
Type	A	B
BVIR100	99	91
BVIR25	124	91

Technical data

Type	Voltage [V-Hz]	Power [W]	IP	Speed [rpm]	Air flow [m3/h]	Noise level at 1m [dB(A)]	Temperature min/max [°C]	Weight [kg]
BVIR100	230V-50Hz	15	IPX4	2550	100	32	+5/+40	0,35
BVIR125	230V-50Hz	16	IPX4	2360	150	36	+5/+40	0,37

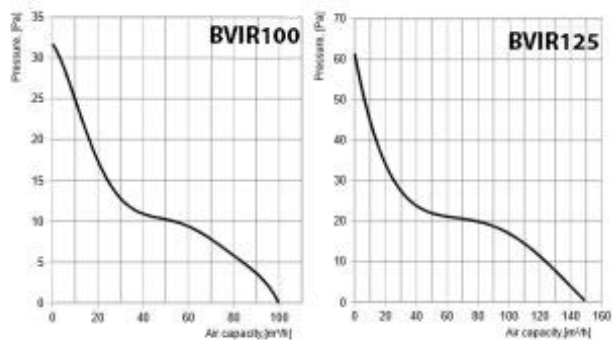

Modifications

BVIRxxxT – fan is equipped with a timer function