


Exhaust fans

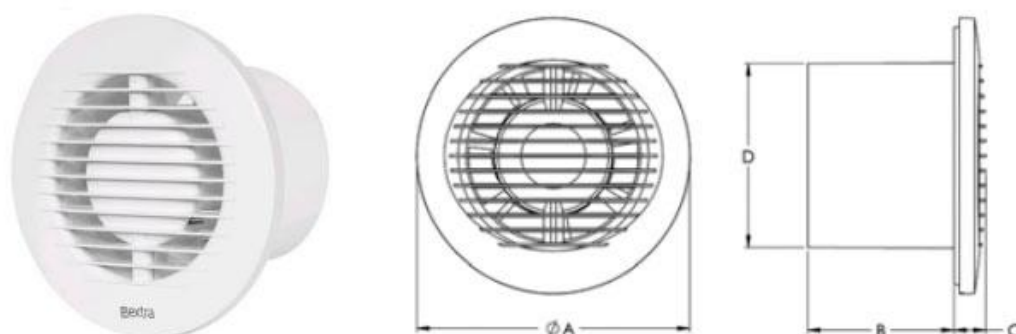

Description

Metal ventilation grilles MR for supply and exhaust ventilation.

Construction

Manufactured from plastic

Fan: axial

Type of bearing class: IPX4

Insulation class: class B

Installation

Mounting with all type round ducts: sheet metal, flexible aluminum, plastic or fabric.

Mounting positions: multiple

Location: indoors

Sizes



100 and 125 mm

Dimensions

Type	A [mm]	B [mm]	C [mm]	D [mm]
BVV100	148	80	16	99
BVV125	173	80	16	124

Technical data

Type	Voltage [V-Hz]	Power [W]	IP	Speed [rpm]	Air flow [m ³ /h]	Noise level at 1m [dB(A)]	Temperature min/max [°C]	Weight [kg]
BVV100	230V-50Hz	15	IPX4	2550	100	32	+5/+40	0,37
BVV125	230V-50Hz	16	IPX4	2360	150	36	+5/+40	0,44

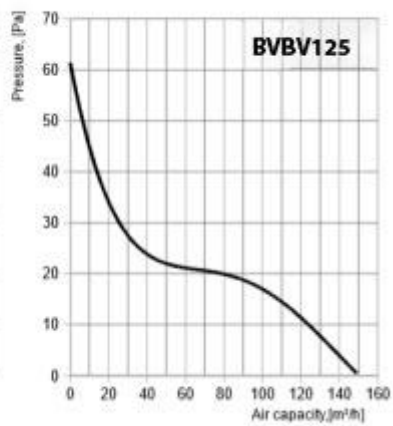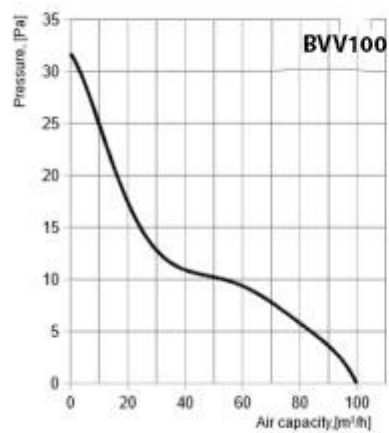

Modifications

BVVxxxT – fan is equipped with a timer function

BVVxxxHT – fan is equipped with a humidity level control function