


Exhaust fans

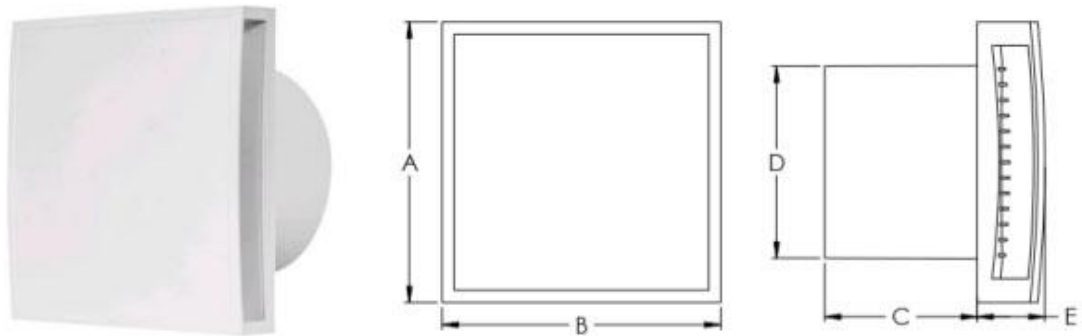

Description

Exhaust fans for wall mounting of premises.

Construction

Manufactured from plastic

Decorative front panel

Fan: axial

Type of bearing: slide bearing

Motor protection class: IPX4

Installation

Mounting with all type round ducts: sheet metal, flexible aluminum, plastic or fabric

Mounting positions: vertical

Location: indoors

Power supply

230V-50Hz single phase



Temperature range

+5°C to + 40°C

Dimensions [mm]					
Type	A	B	C	D	F
BVBV100	145	145	80	99	35
BVBV125	170	170	80	124	35

Technical data

Type	Voltage [V-Hz]	Power [W]	IP	Speed [rpm]	Air flow [m ³ /h]	Noise level at 1m [dB(A)]	Temperature min/max [°C]	Weight [kg]
BVBV100	230V- 50Hz	15	IPX4	2550	100	32	+5/+40	0,43
BVBV125	230V- 50Hz	16	IPX4	2360	150	36	+5/+40	0,52

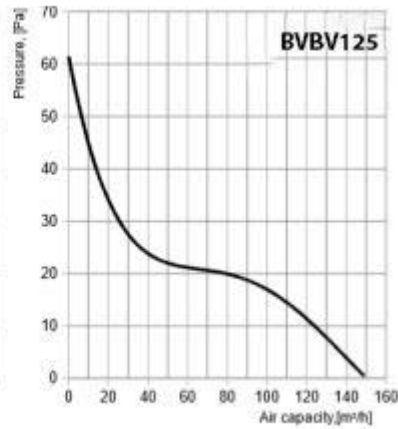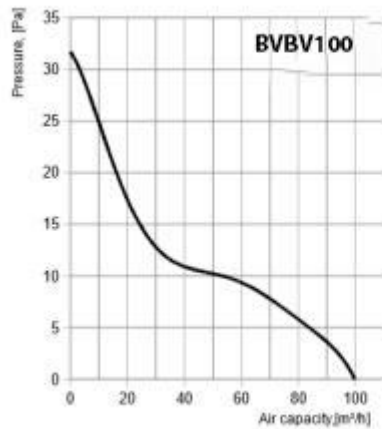

Modifications

BVBVxxxT – fan is equipped with a timer function

BVBVxxxHT - fan is equipped with a humidity level control function