


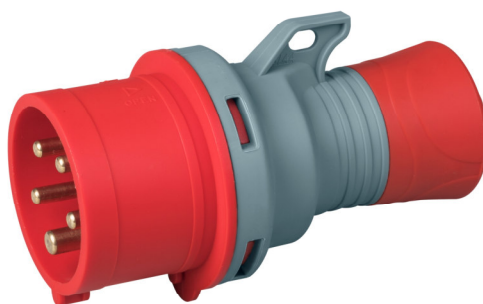

Illustrative picture

SPECIFICS

Description	Product type	Movable plug low voltage 50/60 Hz IP44
	Article code	9215
	Commercial Series	SERIES 10 IEC 309 IP44

General Data

Poles	N°	3P+N+E	Type of material	ABS						
Current	A	16	Type of terminal	Screw PH2						
Voltage	V~	200/346-240/415	Terminal inlet diameter	mm 3,7						
Earth contact position	h	6	Cable clamp tightening capacity	mm 6,5 - 15						
Degree of protection	IP	44	Dimensional stability	°C -25 /+70						
Impact Resistance	IK	8	Resistance glow wire test	°C +650 / +850						
Insulation Resistance	MΩ	>10	Working temperature	°C -,25 + 55						
Dimensions LxDxH	cm	12,5x8,7x8,7	Weight	kg 0,16						
Behaviour with chemical and atmospheric agents										
Saline Solution	Acids		Bases		Solvents				Mineral Oil	UV rays
	Concentrated	Diluted	Concentrated	Diluted	Hexane	Benzol	Acetone	Alcohol		
Resistant	Limited Resistant	Resistant	Resistant	Resistant	Limited Resistant	Limited Resistant	Resistant	Resistant	Resistant	Resistant

Standards	CEI EN 60309-1	CEI EN 60309-2	2014/35/UE
-----------	----------------	----------------	------------

Features package	Descriptions		N/pieces	Weight/kg
	Article		1	0,16
	Package innerbox		8	1,37
	Packaging			

Assembly

Technical drawing of a plug assembly. The drawing shows a side view of the plug with various dimensions labeled. Dimension A is the total length of the plug. Dimension B is the length of the main body. Dimension C is the length of the handle. Dimension D is the length of the base. Dimension E is the diameter of the base. Dimension ØD is the outer diameter of the main body.

Amp Poles	16A			32A		
	3	4	5	3	4	5
A	140	140	140	161	161	161
B	106	106	106	122.5	122.5	122.5
C	46.5	53.5	60.5	62.5	62.5	69.5
D	56	60.5	68	72	72	69
E	6-15	6-15	8-16	11.5-20	11.5-20	11.5-22



Reg. A.E.E n° IT17100000010057

CERTIFICATO N° 9105.ROS3 - UNI EN ISO 9001:2015

DATA	RESPONSABILE TECNICO
30/04/2021	Romano Rosi