

We measure it.



Volume flow hood

testo 420 – light, precise and convenient

Less than 2.9 kg weight

Flow straightener for more precise measurement at swirl outlets

Removable and tiltable measuring instrument with a large display

App integration via Bluetooth for fast and easy monitoring and reporting on site



The new volume flow hood testo 420 is the light, precise and convenient solution for regulating volume flows at larger air intakes and outlets. At swirl outlets in particular, the flow straightener significantly reduces the usual measurement errors. This allows users to fulfil hygienic Indoor Air Quality guidelines and stipulations in ventilation and air conditioning systems quickly and precisely, e.g. in industry, office rooms or in cleanrooms.

Handling is especially easy with a uniquely low weight of less than 2.9 kg and ergonomic handles. The measuring instrument can be tilted and removed for more comfortable readout of the measurement values. In addition to this, mobile devices can be used via Bluetooth App integration as a second display and remote control. This makes the use of a tripod for high ceilings especially secure and comfortable. Users can furthermore use the App to finalize and send the measurement report directly on site.

Technical data

testo 420 set

testo 420 volume flow hood, with body, 610 x 610 mm flow hood, 5 x tension rods, USB cable, batteries and trolley

Part no. 0563 4200

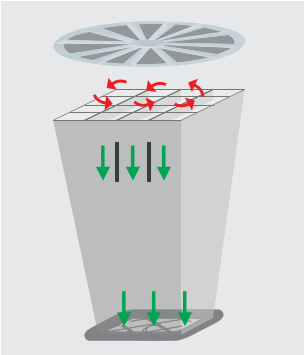


General technical data

Compatability	requires iOS 7.1 or newer / Android 4.3 or newer
	requires mobile end device with Bluetooth 4.0
Operating temperature	-5 to +50 °C
Storage temperature	-20 to +60 °C
Weight	2.9 kg
Standard hood	610 x 610 mm
Battery type	Alkali manganese, mignon, Type AA
Battery life	40 h
Display	Dot matrix with illumination
Memory	2 GB internal
Interface	Micro USB
Warranty	2 years

Sensor types

	Volume flow	NTC	Capacitive humidity sensor	Differential pressure sensor
Measuring range	40 to 4000 m³/h	-20 to +70 °C	0 to 100 %RH	-120 to +120 Pa
Accuracy ±1 digit	±3 % of m.v. +12 m³/h at +22 °C, 1013 hPa (85 to 3500 m³/h)	±0.5 °C (0 to +70 °C) ±0.8 °C (-20 to 0 °C)	±1.8 %RH +3 % of m.v. at +25 °C (5 to 80 %RH)	±2 % of m.v. +0.5 Pa at +22 °C, 1013 hPa
Resolution	1 m³/h	0.1 °C	0.1 %RH	0.001 Pa



Functional principle of the flow straightener.



Flow straightener for significantly more precise measurements at swirl outlets.



App integration via Bluetooth for displaying the measurement data on mobile devices and finalizing the measurement report on site.



Stable, wheeled tripod with central fitting for secure working at high ceiling outlets.

Accessories



Part no.

Flow hood 360 x 360 mm	0554 4200	
Flow hood 305 x 1220 mm	0554 4201	
Flow hood 610 x 1220 mm	0554 4202	
Tripod, extendable to 4 m	0554 4209	
Connection hose; silicone; length 5 m; max. load 700 hPa (mbar)	0554 0440	
Connection hose silicone-free for differential pressure measurement, length 5 m, load up to maximum 700 hPa, (mbar)	0554 0453	

Calibration Certificates

ISO calibration certificate, 15 to 2000 m ³ /h bi-directional	0520 0154	
ISO calibration certificate, 10 measurement points regularly distributed over the measuring range (bi-directional) Calibration points 150/300/450/600/750/900/1050/1200/1350/1500 Nm ³ /h	0520 0194	
ISO calibration certificate, 5 measurement points regularly distributed over the measuring range (bi-directional) Calibration points 300/600/900/1200/1500 Nm ³ /h	0520 0164	
DAkkS calibration certificate, 15 to 2000 m ³ /h bi-directional	0520 1264	
DAkkS calibration certificate, 10 measurement points regularly distributed over the measuring range (bi-directional) Calibration points 150/300/450/600/750/900/1050/1200/1350/1500 Nm ³ /h	0520 0294	
DAkkS calibration certificate, 5 measurement points regularly distributed over the measuring range (bi-directional) Calibration points 300/600/900/1200/1500 Nm ³ /h	0520 0264	

Probes

Probe type	Dimensions Probe shaft/probe shaft tip	Measuring range	Part no.	
Pitot tube, 500 mm long, Ø 7 mm, stainless steel, for measuring flow velocity*	 500 mm Ø 7 mm	Measuring range: 1 to 100 m/s Operating temperature: 0 to +600 °C Pitot tube factor: 1.0	0635 2045	
Pitot tube, 350 mm long, Ø 7 mm, stainless steel, for measuring flow velocity*	 350 mm Ø 7 mm	Measuring range: 1 to 100 m/s Operating temperature: 0 to +600 °C Pitot tube factor: 1.0	0635 2145	
Pitot tube, 1000 mm long, stainless steel, for measuring flow velocity*	 1000 mm Ø 7 mm	Measuring range: 1 to 100 m/s Operating temperature: 0 to +600 °C Pitot tube factor: 1.0	0635 2345	

*Connection hose required (order no. 0554 0440) or (order no. 0554 0453)



Comfortable measurement thanks to low weight



Removable instrument allows Pitot tube measurements in ducts (Pitot tube available separately)

1981 0414/msp/A/09.2015

Subject to change without notice.

