

# P3500I HUK

Compact & Lightweight




## FEATURES

- Inverter technology: stable power for safe operation of sensitive electronics.
- OHV engine provides consistent power for multiple applications.
- Low-oil level shutdown automatically safeguards engine from damage.
- Economy mode automatically adjusts the engine speed to the optimum level to provide excellent fuel economy and noise reduction.
- USB ports charges your mobile electronics so you can stay connected.
- Lightweight and compact.
- Easily transportable by handle.
- Ideal for applications requiring low noise
- Connector for Parallel kit
- Oil Bottle, Funnel and Plugs Included in the carton box

## POWERRUSH

MORE STARTING CAPACITY ALLOWING YOU TO DO MORE WITH LESS. Powerrush increases electrical current upon demand, above rated output when starting electric motors.

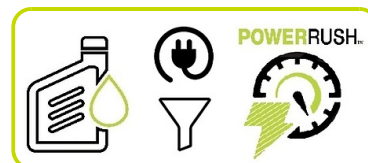

## PERFORMANCE

|             |       |      |
|-------------|-------|------|
| Frequency   | Hz    | 50   |
| Voltage     | V     | 230  |
| Phase       |       | 1    |
| Max Power   | Watts | 3300 |
| Rated Power | Watts | 3000 |



## Engine


|                         |                    |          |
|-------------------------|--------------------|----------|
| Engine Brand            | Pramac             |          |
| Type                    | OHV                |          |
| Exhaust emission level  | Stage V            |          |
| Operating Speed Nominal | rpm                | Variable |
| Fuel                    | Petrol             |          |
| Starting Systems        | Electric (+Recoil) |          |
| Oil capacity            | l                  | 0.6      |
| Low Oil Shutdown        | √                  |          |

## Alternator

|                           |          |
|---------------------------|----------|
| Voltage regulation system | Inverter |
|---------------------------|----------|

## Dimensional data

|                            |        |             |
|----------------------------|--------|-------------|
| Length                     | (L) mm | 601         |
| Width                      | (W) mm | 458         |
| Height                     | (H) mm | 552         |
| Dry weight                 | kg     | 49.5        |
| Carton box dimension LxWxH | mm     | 625x505x580 |

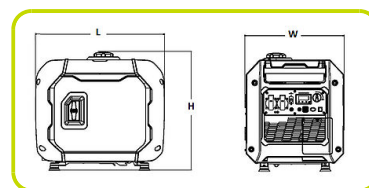

## Autonomy

|                      |     |     |
|----------------------|-----|-----|
| Fuel tank capacity   |     | 10  |
| Fuel consumption 75% | l/h | 1.6 |
| Running time 75%     | h   | 6   |



## Noise level

|                              |       |    |
|------------------------------|-------|----|
| Guaranteed noise level (LWA) | dB(A) | 88 |
| Noise pressure level @ 7 m   | dB(A) | 61 |

## GENSET CONTROL

### COMMANDS

- Selector switch: O/I | Air choke Valve | Power Button
- Smart throttle: Economy mode automatically adjusts the engine speed to the optimum level to provide excellent fuel economy and noise reduction.

### INSTRUMENTATION:

- Outputting energy (light - Green)
- Overloading and Oil alarming (light - Red)
- Voltmeter / Hourmeter / Frequency meter / Fuel gauge
- Parallel kit receptacles

### PROTECTIONS

- Overload; Oil Guard; Short Circuit; Overvoltage; Overtemperature
- Protection Control panel IP 44

### OUTPUT:

- n°2 USB DC 5V 2A



## SOCKET TYPE

|                        |   |
|------------------------|---|
| 230V BS1363 (13A) IP44 | 2 |
|------------------------|---|

The information is aligned with the Data file at the time of download. Printed on 20/07/2022 (ID 16257)

©2022 | PR INDUSTRIAL s.r.l. | All rights reserved | Image shown may not reflect actual package. Specifications subject to change without notice

