



INVERTER HEAT PUMPS

HPP-iw 12-16-22-28

HEAT PUMPS FOR PRIVATE AND PUBLIC SWIMMING POOLS

HEATING FOR OUTDOOR SWIMMING POOLS

Dantherm's new range of HPP-iw inverter heat pumps are specifically designed for heating small and medium sized outdoor swimming pools and spas through the whole season.



HPP-iw

The low energy consumption coupled with high heat production makes the HPP-iw heat pump an environmentally friendly way to heat your swimming pool.


Unlike alternative ways of heating pools, the HPP-iw heat pump requires no fuel storage tank or high capacity electrical supply. It produces no smell, fumes or CO₂ gases.

HPP-iw heat pumps are designed to work all year round when temperatures are above -10°C. Thus, the pool season can be extended for several months.

Rapid installation, flexible operation

Dantherm HPP-iw heat pumps are easy to install and fully self-contained units. When it comes to operation, the HPP-iw units offer a quiet, high efficient, reliable, and safe performance.

Temperature control chart

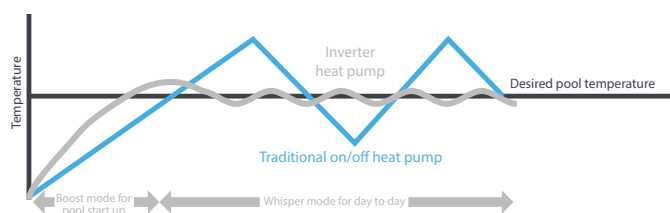

Features

- Inverter heat pump
- Average COP 10.3 = 2 x more efficient than on/off heat pumps
- Eco-friendly refrigerant R32 = 675 GWP, (Global Warming Potential)
- Increased range of performance ratings from 15 to 36kW
- 9-11 dB(A) sound reduction compared to an equivalent on/off heat pump, with 'Whisper Mode'
- Multifunction operation functions can be set to heating, heat/cool and cooling
- Soft start-up
- Aluminium alloy
- Built-in Wi-Fi module



Benefits

- All year heating for outdoor and indoor pools
- Can operate down to -10°C ambient air temperature
- High heating performance at lower temperatures – ideal for quick pool heat up at the start of the season
- Pool heating at altitude
- Higher cooling capacity
- Most efficient models – highest COP

Options

- Remote LED control kit
- Winter protection cover

Controls

The HPP-iw heat pump has an integrated controller with a touchscreen user interface.

The basic functions are:

- Function settings for: Heating, Cooling or Heat/Cool
- 24-hour time clock
- Timer ON/OFF
- Parameter adjustment



HEATING FOR OUTDOOR SWIMMING POOLS

New refrigerant gas

With the introduction F-Gas regulations in Europe, our new heat pump will use the low Global Warming Potential (GWP) refrigerant R32.


This refrigerant:

- Has a low GWP (675)
- Zero ozone depleting potential (ODP)
- Is F-Gas phase down compliant
- Requires less refrigerant volume per kW
- Is easier to reuse and recycle

Applications

- Outdoor pools
- Private pools
- Spa pools
- Above ground pools
- Wellness centres
- Therapy pools

Heating method efficiency chart

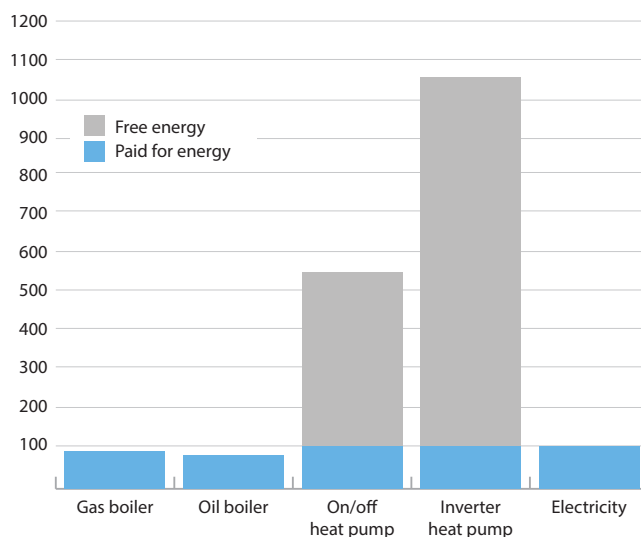

Great value, and environmentally conscious heating option, with energy consumption half that of a traditional on/off heat pump, and 1/10 of that for gas or electric pool heating.

Specifications	Units	HPP-iw 12	HPP-iw 16	HPP-iw 22	HPP-iw 28
Air temperature range	°C	-10-43	-10-43	-10-43	-10-43
Water temperature range	°C	12-40	12-40	12-40	12-40
Performance – air 27°C 80% RH, Water 27°C					
Heating capacity	kW	15.0	21.0	27.5	36.0
COP range		15.0-6.6	14.8-6.4	15.0-6.5	14.8-6.0
Average COP at 50% speed		10.6	10.3	10.3	10.2
Performance – air 15°C 70% RH, Water 26°C					
Heating capacity	kW	10.5	14.5	18.0	23.9
Performance – air 5°C 70% RH, Water 10°C					
Heating capacity	kW	7.5	9.6	11.9	16.0
Performance – air -10°C 70% RH, Water 23°C					
Heating capacity	kW	4.6	5.9	7.3	8.8
Performance – air 35°C 80% RH, Water 28°C					
Cooling capacity	kW	6.7	9.5	11.9	16.0
Power supply	V/Hz	230/1ph/50	400/3ph/50	400/3ph/50	400/3ph/50
Rated input power	kW	0.27-2.28	0.41-3.15	0.48-3.91	0.64-5.20
Maximum input current	A	13.5	5.8	9.5	0.92-7.53
Water flow	m ³ /h	5.0-7.0	8.0-10.0	10.0-12.0	12.0-18.0
Water connection	mm ²	1½" or 50mm	1½" or 50mm	1½" or 50mm	1½" or 50mm
Compressor		Inverter	Inverter	Inverter	Inverter
Condenser		Titanium	Titanium	Titanium	Titanium
R32 gas weight	g	900	1200	2000	2700
Sound level @ 10m	dB(A)	20.8-24.5	20.4-33.7	23.0-34.4	22.1-34.2
Product size (w x d x h)	mm	954 x 359 x 648	954 x 429 x 755	1084 x 429 x 948	1154 x 539 x 948
Net Weight	kg	52	68	93	120

Dantherm A/S

Marienlystvej 65
DK-7800 Skive
Denmark
t. +45 96 14 37 00

Dantherm Ltd.

Unit 12, Galliford Road
Maldon CM9 4XD
United Kingdom
t. +44 (0)1621 856611

Dantherm GmbH

Oststraße 148
22844 Norderstedt
Germany
t. +49 40 526 8790

Dantherm S.p.A.

Via Gardesana 11
37010 Pastrengo (VR)
Italy
t. +39 045 6770533

Dantherm Sp. z o.o.

ul. Magazynowa 5a
62-023 Gądk
Poland
t. +48 61 65 44 000

Dantherm SP S.A.

C/Calabozos 6
(Polígono Industrial)
28108 Alcobendas, Madrid
Spain
t. +34 91 661 45 00

Dantherm SAS

23 rue Eugène Henaff
69694 Vénissieux Cedex
France
t. +33 4 78 47 11 11

Dantherm AS

Løkkeåsveien 26
3138 Skallestad
Norway
t. +47 33 35 16 00

Dantherm AB

Fridhemsvägen 3
602 13 Norrköping
Sweden
t. +46 (0)11 19 30 40

Dantherm LLC

Transportnaya 22/2
142800, Stupino
Moscow
Russia
t. +7 (495) 642 444 8

MCS China

Unit 2B, No. 512
Yunchuan Road
Baoshang, Shanghai, 201906
China
t. +8621 61486668

Termigo S.L

Carrer dels Velluters, 18-2
46980 Paterna, Valencia
Spain
t. +34 961 524 866

AirCenter AG

Täferstrasse 14
CH-5405 Baden Dättwil
Switzerland
t. +41 43 500 00 50

Heylo GmbH

Im Finigen 9
28832 Achim
Germany
t. +49 4202 97550

SET Energietechnik GmbH

August-Blessing-Straße 5
Hemmingen, 71282
Germany
t. +49 7150 94540

Dealer:

KEEP UPDATED
FOLLOW US ON:



danthermgroup.com