



BUFFER TANKS

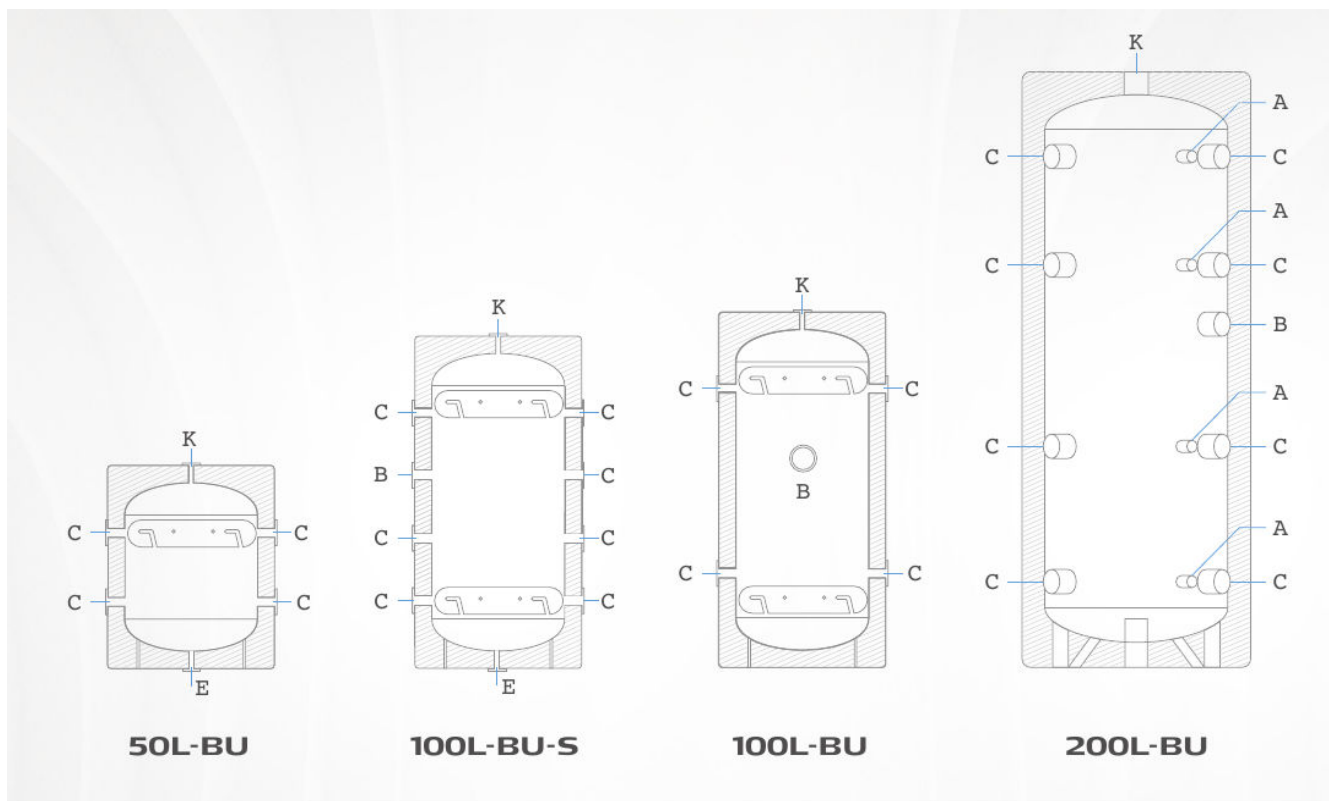

Model		50L-BU	100L-BU-S	100L-BU	200L-BU
Volume	L	50	100	100	200
Height	mm	520	915	950	1710
Diameter (with insulation)	mm	440	440	480	500
Diameter (without insulation)	mm	400	400	400	400
Net weight	kg	17	29	35	47
Max pressure / temperature	bar/°C	6 / 95	6 / 95	3 / 95	3 / 95
Electric heating element (optional)	B		up to 3 kW	up to 3 kW	up to 6 kW
Number of connections	pcs	4	8	4	8
Connection size	C	1 1/2"	1 1/2"	1"	1 1/2"
Drain	E	1 1/2"	1 1/2"		
Number of sensor pockets	pcs				4
Sensor pocket size	A				1/2"
Air vent	K	1 1/2"	1 1/2"	1/2"	1 1/2"

BUFFER TANKS

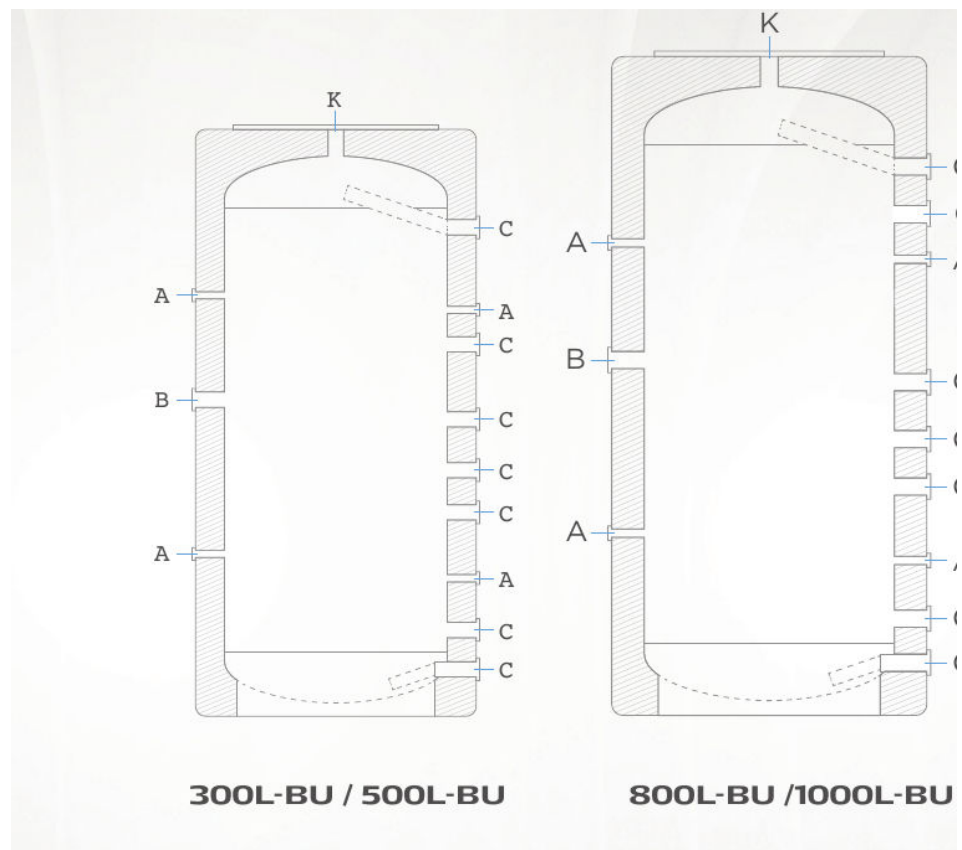

Model		300L-BU	500L-BU	800L-BU	1000L-BU
Volume	L	300	500	800	1000
Height	mm	1460	1660	1910	2090
Diameter (with insulation)	mm	750	850	990	990
Diameter (without insulation)	mm	650	650	790	790
Insulation (removable)	mm	50	100	100	100
Net weight	kg	70	102	134	151
Pressure / max temperature	bar/°C	3 / 95	3 / 95	3 / 95	3 / 95
Electric heating element (optional)	B	up to 9 kW	up to 18 kW	up to 18 kW	up to 18 kW
Number of connections	pcs	7	7	7	7
Connection size	C	1 1/2"	1 1/2"	1 1/2"	1 1/2"
Number of sensor pockets	pcs	4	4	4	4
Sensor pocket size	A	1/2"	1/2"	1/2"	1/2"
Air vent	K	1 1/2"	1 1/2"	1 1/2"	1 1/2"