

Technical data sheet

Equipotential busbar for outside installation

Item no. 5015111



Equipotential busbar for equipotential bonding according to DIN VDE 0100-410/-540 and lightning protection equipotential bonding according to DIN VDE 0185-305

- Cover hood and base plate made of polystyrene
- Colour: Black, UV-resistant
- Screws and crossbar made of VA
- Capable of carrying lightning current 50 kA (10/350)

Connection options:

- 7 x single or multi-core cables to 25 mm² or fine-core cables to 16 mm²
- 1 x round conductor Rd 8-10
- 1 x flat strip to FL30 or round conductor Rd 8-10



A2 Stainless steel, rustproof 1.4301

Master data

Item no.	5015111
Type	1809 A
Description 1	Equipotential busbar
Description 2	for outdoor use
Dimension	50x5mm
Colour	Black
Material	Stainless steel, material no. 1.4301
Material symbol	A2
Smallest sales unit (VG)	1,00 Piece
Weight	23,00 kg/100 pc.


Technical data sheet

Equipotential busbar for outside installation

Item no. 5015111



Technical data

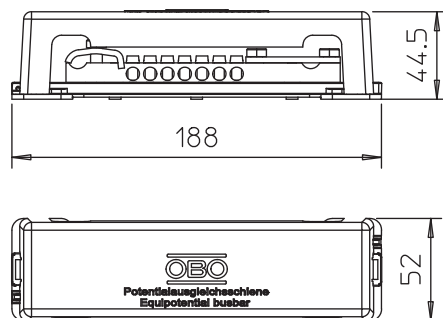

Length	188,00 mm
Width	52,00 mm
Height	44,50 mm
Connection option 1	7 x single or multi-core cables to 25 mm ² or fine-core cables to 16 mm ²
Connection option 2	1 x round conductor Rd 8 - 10
Connection option 3	1 x flat strip FL30 or round conductor Rd 8 - 10
Quantity of round conductor connections, total	1,00
Quantity of round conductor connections 8 mm	0,00
Quantity of round conductor connections 10 mm	0,00
Quantity of round conductor connections 8-10 mm	1,00
Quantity of flat conductor connections up to 30 mm	1,00
Quantity of flat conductor connections up to 40 mm	0,00
Quantity of cable connections up to 6 mm ² , rigid	0,00
Quantity of cable connections up to 16 mm ² , rigid	0,00
Quantity of cable connections up to 25 mm ² , rigid	7,00
Quantity of cable connections up to 95 mm ² , rigid	0,00
Version	With cover hood
Shape	Fixed structure
Lightning current carrying capacity	N/50 kA
Insulator	☒
Material of the terminal	Steel
Surface of the terminal	Electrogalvanised
Material of the contact rail	Brass
Surface of the contact rail	Nickel-plated