






Area of Application:
Panel mounted
High purity gases 5.0
Max. working pressure P1.: 21 Bar
Pressure regulation P2.: 0-10 Bar

Details:
Shut-Off (stop) Valve: Open / close 1,5x360°
3-Zone colour, acc. to EN13792:2002

Materials in media contact:
Brass
SS, AISI 316
PVDF

Mounting:
1/2" nut with locking pins o-ring and washer (See 94G0232)

Inlet / outlet connection:
UniFlex
1/4" NPT- female connection

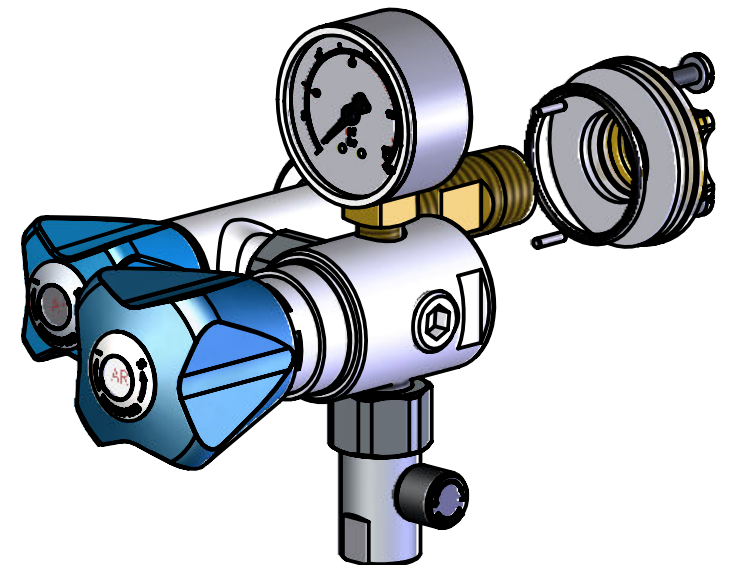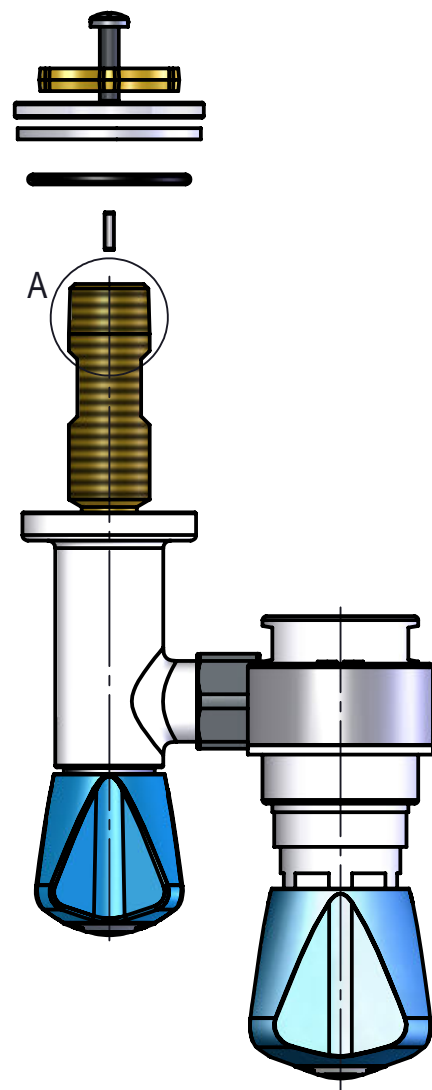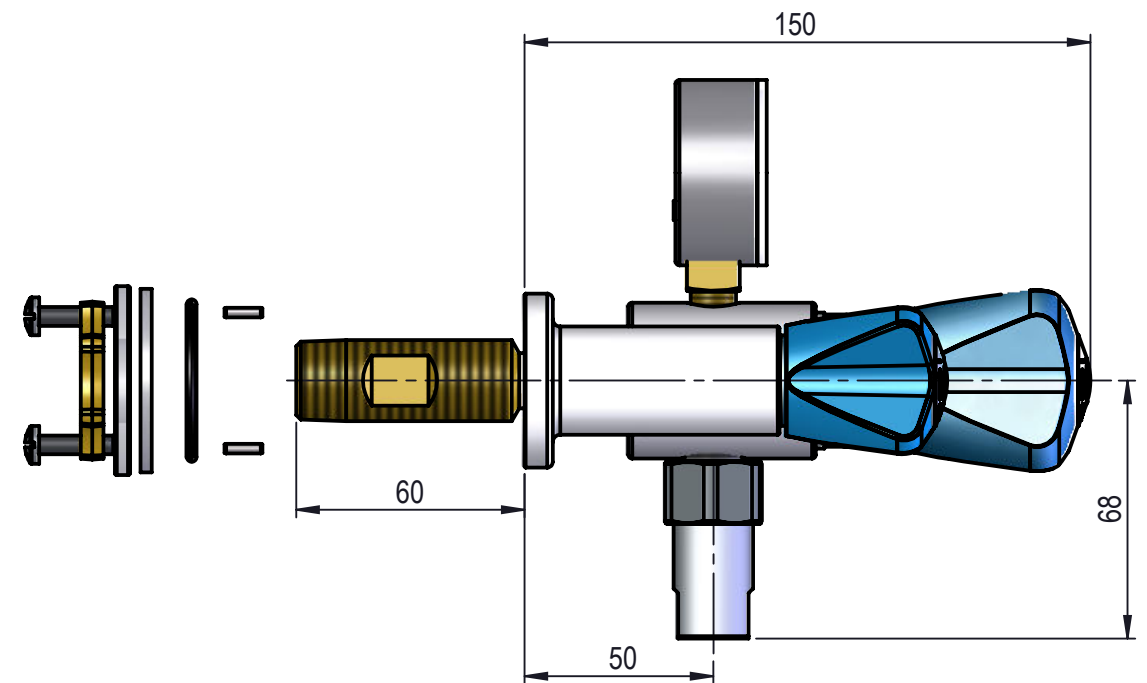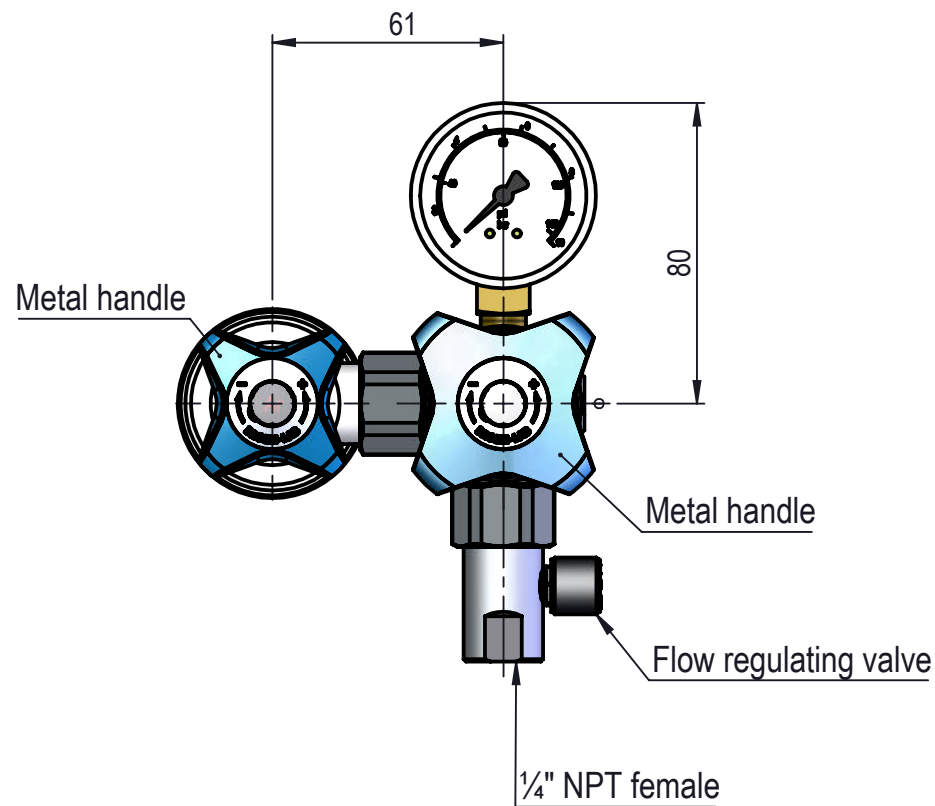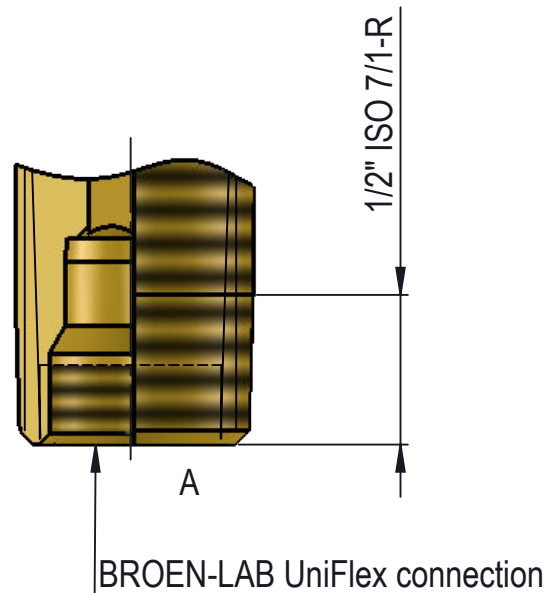

MEDIA CODE XX FOR 5.0 TECHNICAL GASES AND OXYGEN		
Media	Media description	Media code XX
H ₂	Hydrogen	19
CA	Compressed air	21
O ₂	Oxygen	22
N ₂	Nitrogen	23
CO ₂	Carbon dioxide	24
Ar	Argon	25
He	Helium	26
N ₂ O	Dinitrogenmonoxide	27

Description: Build-in pressure regulator, 10 bar, Panel mounted, 1-Hole, Fixed, UniFlex									
							Media: High purity gases 5.0		
							Comments:		
							Drawing type: Customer drawing		Weight: 1.355 Kg
Rev.	Pos.	Date	TM No.	Design by	Drawn by:	Change:	Designed by: BJP	Drawn by: MWA	Released on TM No. 07-10-2019
BROEN-LAB						This drawing is our property and cannot be given to a third party, copied or otherwise used without our permission. BROEN-LAB A/S.	Format: A3	Drawing No.: 250506410XX-14	