

**VSPC BASE 2SL****Weidmüller Interface GmbH & Co. KG**

Klingenbergstraße 26

D-32758 Detmold

Germany

[www.weidmueller.com](http://www.weidmueller.com)

Base element for the pluggable VSPC arrester, integrated PE foot in impedance-neutral VSPC BASE. Can safely discharge up to 20 kA (8/20 µs) and 2.5 kA (10/350 µs) to the PE.

**General ordering data**

|            |                                                                  |
|------------|------------------------------------------------------------------|
| Version    | Surge protection, Flange-mounted housing, Flange-mounted housing |
| Order No.  | <a href="#">8924720000</a>                                       |
| Type       | VSPC BASE 2SL                                                    |
| GTIN (EAN) | 4032248696369                                                    |
| Qty.       | 1 items                                                          |

## VSPC BASE 2SL

Weidmüller Interface GmbH &amp; Co. KG

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

## Technical data

## Approvals

Approvals



ROHS Conform

UL File Number Search [UL Website](#)

Certificate No. (UL) E311081

## Dimensions and weights

|            |         |                 |             |
|------------|---------|-----------------|-------------|
| Depth      | 69 mm   | Depth (inches)  | 2.7165 inch |
| Height     | 90 mm   | Height (inches) | 3.5433 inch |
| Width      | 17.8 mm | Width (inches)  | 0.7008 inch |
| Net weight | 48 g    |                 |             |

## Temperatures

|                     |                |                       |                |
|---------------------|----------------|-----------------------|----------------|
| Storage temperature | -40 °C...80 °C | Operating temperature | -40 °C...70 °C |
| Humidity            | 5...96 %       |                       |                |

## Environmental Product Compliance

|                        |                             |
|------------------------|-----------------------------|
| RoHS Compliance Status | Compliant without exemption |
| REACH SVHC             | No SVHC above 0.1 wt%       |

## Rated data UL

|                      |         |                |                                                                        |
|----------------------|---------|----------------|------------------------------------------------------------------------|
| Certificate No. (UL) | E311081 | UL certificate | UL 497b Certificate - PDF/<br>E311081VOL1SEC2.pdf<br>(application/pdf) |
|----------------------|---------|----------------|------------------------------------------------------------------------|

## CSA protection data

|                              |        |                 |     |
|------------------------------|--------|-----------------|-----|
| Gas group D                  | IIA    | Gas groups A, B | IIC |
| Input-current, max. II       | 300 mA | Gas group C     | IIB |
| Internal inductance, max. LI | 0 µH   |                 |     |

## General data

|                           |                        |               |                                       |
|---------------------------|------------------------|---------------|---------------------------------------|
| Optical function display  | No                     | Segment       | Measurement - Monitoring<br>- Setting |
| Version                   | Flange-mounted housing | Design        | Terminal, miscellaneous               |
| UL 94 flammability rating | V-0                    | Colour        | black                                 |
| Protection degree         | IP20                   | Mounting rail | TS 35, TS 35 x 7.5                    |

## Insulation coordination acc. to EN 50178

|                        |     |                    |   |
|------------------------|-----|--------------------|---|
| Surge voltage category | III | Pollution severity | 2 |
|------------------------|-----|--------------------|---|

## Rated data IEC / EN

|                    |       |                  |                                                                           |
|--------------------|-------|------------------|---------------------------------------------------------------------------|
| Signalling contact | No    | Rated current IN | 300 mA                                                                    |
| Voltage type       | AC/DC | Standards        | IEC 61643-21, IEC 62305,<br>DIN EN 60079-0:2009,<br>DIN EN 60079-11:2007, |

## VSPC BASE 2SL

Weidmüller Interface GmbH &amp; Co. KG

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

DIN EN 60079-26:2007,  
DIN EN 61241-11:2006

## Technical data

## Further details of approvals

|                  |                                                              |
|------------------|--------------------------------------------------------------|
| GOST certificate | GOST-Zertifikat -<br>PDF/7950_n1-n4.pdf<br>(application/pdf) |
|------------------|--------------------------------------------------------------|

## Connection data

|                                                               |                     |                                                               |                     |
|---------------------------------------------------------------|---------------------|---------------------------------------------------------------|---------------------|
| Stripping length                                              | 7 mm                | Type of connection                                            | Screw connection    |
| Stripping length, rated connection                            | 7 mm                | Tightening torque, min.                                       | 0.5 Nm              |
| Tightening torque, max.                                       | 0.8 Nm              | Clamping range, min.                                          | 0.5 mm <sup>2</sup> |
| Clamping range, max.                                          | 4 mm <sup>2</sup>   | Wire cross-section, solid, min.                               | 0.5 mm <sup>2</sup> |
| Wire cross-section, solid, max.                               | 4 mm <sup>2</sup>   | Wire connection cross section, finely<br>stranded, max.       | 2.5 mm <sup>2</sup> |
| Conductor cross-section, flexible, AEH<br>(DIN 46228-1), min. | 0.5 mm <sup>2</sup> | Conductor cross-section, flexible, AEH<br>(DIN 46228-1), max. | 2.5 mm <sup>2</sup> |
| Connection cross-section, stranded, min.                      | 0.5 mm <sup>2</sup> | Connection cross-section, stranded,<br>max.                   | 2.5 mm <sup>2</sup> |
| Blade size                                                    | 0.6 x 3.5 mm        |                                                               |                     |

## Electrical data

|              |       |
|--------------|-------|
| Voltage type | AC/DC |
|--------------|-------|

## General data

|                   |      |        |       |
|-------------------|------|--------|-------|
| Protection degree | IP20 | Colour | black |
|-------------------|------|--------|-------|

## Ratings IECEx/ATEX/cUL

|                 |                                                          |
|-----------------|----------------------------------------------------------|
| cUL certificate | cUL Certificate - pdf/<br>VSPC.PDF (application/<br>pdf) |
|-----------------|----------------------------------------------------------|

## Classifications

|             |             |             |             |
|-------------|-------------|-------------|-------------|
| ETIM 6.0    | EC000472    | ETIM 7.0    | EC000472    |
| ETIM 8.0    | EC000472    | ETIM 9.0    | EC000472    |
| ETIM 10.0   | EC000472    | ECLASS 9.0  | 27-13-08-03 |
| ECLASS 9.1  | 27-13-08-07 | ECLASS 10.0 | 27-13-08-03 |
| ECLASS 11.0 | 27-13-08-03 | ECLASS 12.0 | 27-17-15-91 |
| ECLASS 13.0 | 27-17-15-91 | ECLASS 14.0 | 27-17-15-91 |
| ECLASS 15.0 | 27-17-15-91 |             |             |

## Tender specification sheets

|                    |                                                                                                                                                                                                                                                                                                                                 |                     |                                                                                                                        |
|--------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------|------------------------------------------------------------------------------------------------------------------------|
| Long specification | Base element can take<br>a protected plug for up<br>to two floating-ground<br>powered paired cables.<br>When the base unit is<br>fitted, a simultaneous<br>electrically conducting<br>contact is made between<br>the mounting rail (earth)<br>and the reference potential<br>(ground) of the protection<br>circuit in the plug. | Short specification | Base element receives<br>a protected plug for two<br>floating-ground powered<br>paired cables with direct<br>earthing. |
|--------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------|------------------------------------------------------------------------------------------------------------------------|

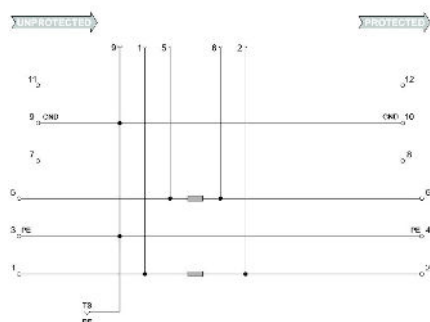
## Technical data

Mechanical coding of the base element to the protected plug according to switching type and rated voltage. The base unit is coded itself by the first insertion of a protected plug. Possible to mark all terminals

**VSPC BASE 2SL**

**Weidmüller Interface GmbH & Co. KG**  
 Klingenbergstraße 26  
 D-32758 Detmold  
 Germany

[www.weidmueller.com](http://www.weidmueller.com)

**Drawings**
**Electric symbol**


Circuit diagram

| Cate-<br>gory | Testing<br>pulse         | Surge<br>voltage                | Surge<br>current                 | Pulse | Type                                                       |
|---------------|--------------------------|---------------------------------|----------------------------------|-------|------------------------------------------------------------|
| C1            | Quick-<br>rising<br>edge | 0.5 - 2 kV<br>with<br>1.2/50 µs | 0.25 - 1 kA<br>mit<br>8/20 µs    | 300   | Surge<br>voltage<br>arrester                               |
| C2            | Quick-<br>rising<br>edge | 2 - 10 kV<br>with<br>1.2/50 µs  | 1 - 5 kA<br>mit<br>8/20 µs       | 10    | Surge<br>voltage<br>arrester                               |
| C3            | Quick-<br>rising<br>edge | ≥ 1 kV<br>with<br>1 kV/µs       | 10 - 100 A<br>mit<br>10/10000 µs | 300   | Surge<br>voltage<br>arrester                               |
| D1            | High<br>power            | ≥ 1 kV                          | 0.5 - 2.5 kA<br>mit 10/350<br>µs | 2     | Arrester for<br>lightning<br>current and<br>surge voltages |

Discharge capacity