


ATS1500A-IP-MBC

Advisor Advanced IP panel motherboard card

Product overview

Replacement PCB for ATS1500A-IP.

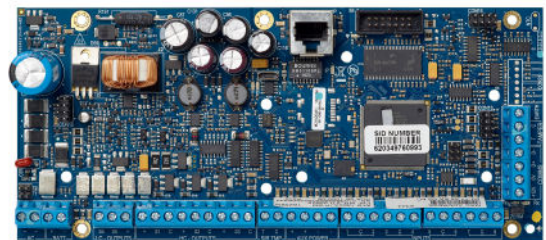

Details

- Replacement for ATS1500A-IP panels

ATS1500A-IP-MBC

Advisor Advanced IP panel motherboard card

Technical specifications

System

Product line	Advisor Advanced
Product type	Integrated Access Control
Panel type	Hybrid
Kit	No
No. of keypads / readers	8
Data Gathering Panels (DGP)	7
No. of alarm groups	16
Specified cable	WCAT52 / WCAT54 or equivalent

Inputs

Max no. of inputs	32
Onboard inputs	8
Inputs plug-in expansion	8

Outputs

No. of outputs	128
No. of onboard outputs	5

Area

No. of areas	4
--------------	---

User / cards

Max. no. of users	more than 2000
Users with name	1000
Max. no. of cards	2000 to 65532
Max. no. of PIN codes	2000 to 65532

Access control

Standard doors on control panel	4
Door groups	128
Floor groups	128
Intelligent doors on 4-door DGPs	28

Communication

Onboard transmission type	IP
Transmission extension	GSM, GSM/GPRS, GSM/GPRS/IP, PSTN
Databus type	RS485

Event log

Alarm event log	14500
Access event log	10000

Electrical

Mainboard current consumption	150 mA
Max system current	950 mA at 13.8 V $\pm$ 0.2 V
Max aux power current	750 mA (depends on backup power needs)
Auto-reset fuses	5

Physical

Physical dimensions	202 x 90 x 40 mm
Housing	No housing

Environmental

Operating temperature	-10 to +55°C
Relative humidity	95% noncondensing

Regulatory

EN50131 Grade	Grade 2
Compliance	CE
Certification	CE



As a company of innovation, Kidde Global Solutions reserves the right to change product specifications without notice. For the latest product specifications, visit firesecurityproducts.com online or contact your sales representative.

Last updated on 7 May 2026 - 14:05