


ATS4500A-IP-MBC

Advisor Advanced IP panel motherboard card, 8-512 zones, EN Grade 3

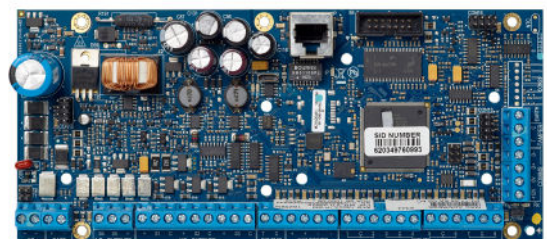

Details

- Replacement board for ATS4500A-IP panel

ATS4500A-IP-MBC

Advisor Advanced IP panel motherboard card, 8-512 zones, EN Grade 3

Technical specifications

System

Product line	Advisor Advanced
Product type	Integrated Access Control
Panel type	Hybrid
No. of keypads / readers	32
Data Gathering Panels (DGP)	30
No. of alarm groups	128
Specified cable	WCAT52 / WCAT54 or equivalent

Inputs

Max no. of inputs	512
Onboard inputs	8
Inputs plug-in expansion	8

Outputs

No. of outputs	128
No. of onboard outputs	5

Area

No. of areas	64
--------------	----

User / cards

Max. no. of users	more than 2000
Users with name	1000
Max. no. of cards	2000 to 65532
Max. no. of PIN codes	2000 to 65532

Access control

Standard doors on control panel	16
Door groups	128
Floor groups	128
Intelligent doors on 4-door DGPs	48

Communication

Onboard transmission type	IP
Transmission extension	GSM, GSM/GPRS, GSM/GPRS/IP, PSTN
Databus type	RS485

Event log

Alarm event log	14500
Access event log	10000

Electrical

Mainboard current consumption	150 mA
Max system current	2500 mA
Max aux power current	1600 mA
Auto-reset fuses	5

Physical

Physical dimensions	202 x 90 x 40 mm
Housing	No housing

Environmental

Operating temperature	-10 to +55°C
Relative humidity	95% noncondensing

Regulatory

EN50131 Grade	Grade 3
Compliance	CE
Certification	CE



As a company of innovation, Kidde Global Solutions reserves the right to change product specifications without notice. For the latest product specifications, visit firesecurityproducts.com online or contact your sales representative.

Last updated on 7 May 2026 - 14:05