
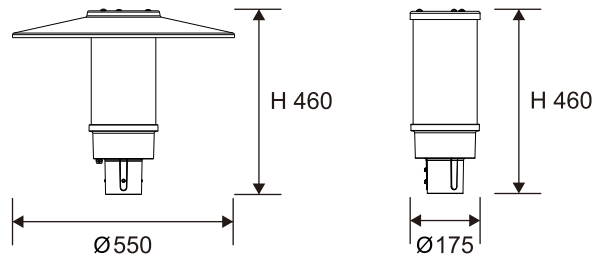


Post Top Polaris

OPPLE

Version date 22-01-2025
www.opple.com

Item Code	CCT	kg
718004002500	3000K/4000K	4.5
718004001700	3000K/4000K	4.5
718004001900	3000K/4000K	4.5
718004001500	3000K/4000K	4.5
718004002200	3000K/4000K	3.2
718004002000	3000K/4000K	3.2
718004002100	3000K/4000K	3.2
718004002400	3000K/4000K	3.2




Model Name	Diameter (mm)	Ø (mm)	H (mm)	Rated Voltage(V~)	Frequency (Hz)	Power Factor	Current (A)	Rated Power(W)
LEDPostTop-Po-P Rd550-35W-DA-730/740-W	Spigot: 76	550	460	220-240	50/60	0.9	0.177	35
LEDPostTop-Po-P Rd550-35W-DA-730/740-AS								35
LEDPostTop-Po-P Rd550-15/35W-730/740-W								15/25/35
LEDPostTop-Po-P Rd550-15/35W-730/740-AS								15/25/35
LEDPostTop-Po-P Rd160-35W-DA-730/740-W	175	175	460	220-240	50/60	0.9	0.177	35
LEDPostTop-Po-P Rd160-35W-DA-730/740-AS								35
LEDPostTop-Po-P Rd160-15/35W-730/740-W								15/25/35
LEDPostTop-Po-P Rd160-15/35W-730/740-AS								15/25/35

Product Code	Product Description	N	QR Code	Energy Label
718004002500	LEDPostTop-Po-P Rd550-35W-DA-730/740-W	1		
718004001700	LEDPostTop-Po-P Rd550-35W-DA-730/740-AS	1		
718004001900	LEDPostTop-Po-P Rd550-15/35W-730/740-W	1		
718004001500	LEDPostTop-Po-P Rd550-15/35W-730/740-AS	1		
718004002200	LEDPostTop-Po-P Rd160-35W-DA-730/740-W	1		
718004002000	LEDPostTop-Po-P Rd160-35W-DA-730/740-AS	1		
718004002100	LEDPostTop-Po-P Rd160-15/35W-730/740-W	1		
718004002400	LEDPostTop-Po-P Rd160-15/35W-730/740-AS	1		

* This product contains a light source of energy efficiency class (C).

OPPLE

Power and CCT Selectable

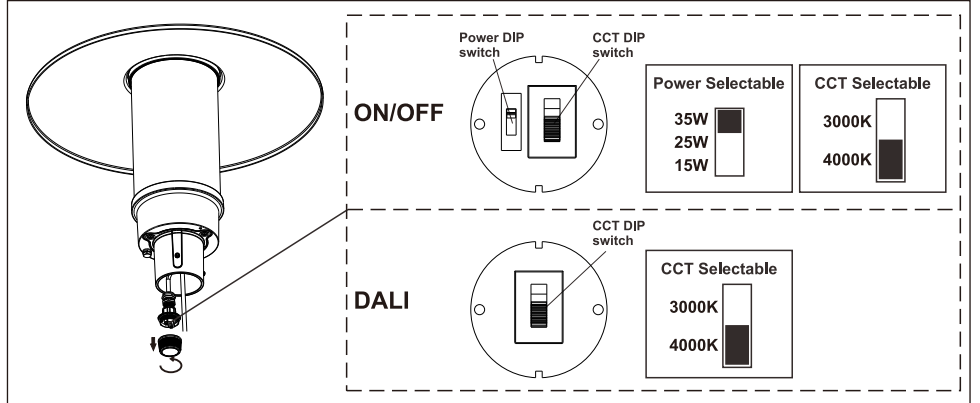


Installation

1. ✂




After installation is complete, remove the PE film from the fixture.

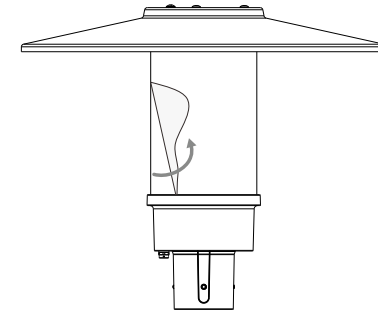


2. ✂

* M6 gasket for grounding, install under any screw.

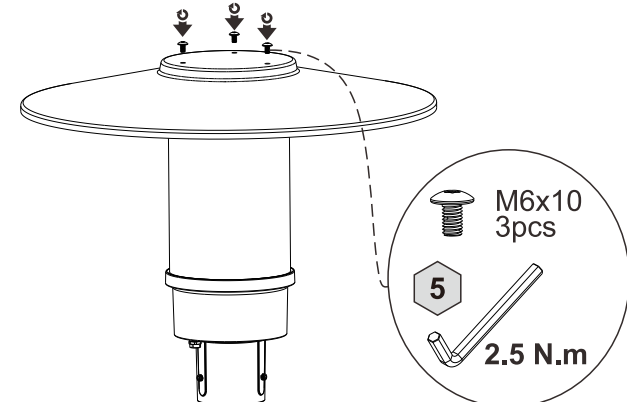


3. ✂

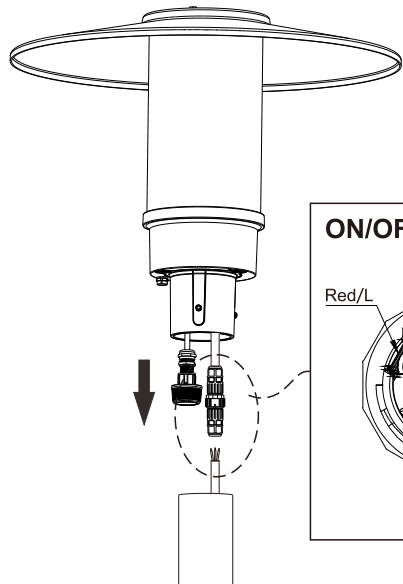


Warning! Do not wire dim cord to high voltage, or dim function will fail.



ON/OFF



DALI



4. ✂

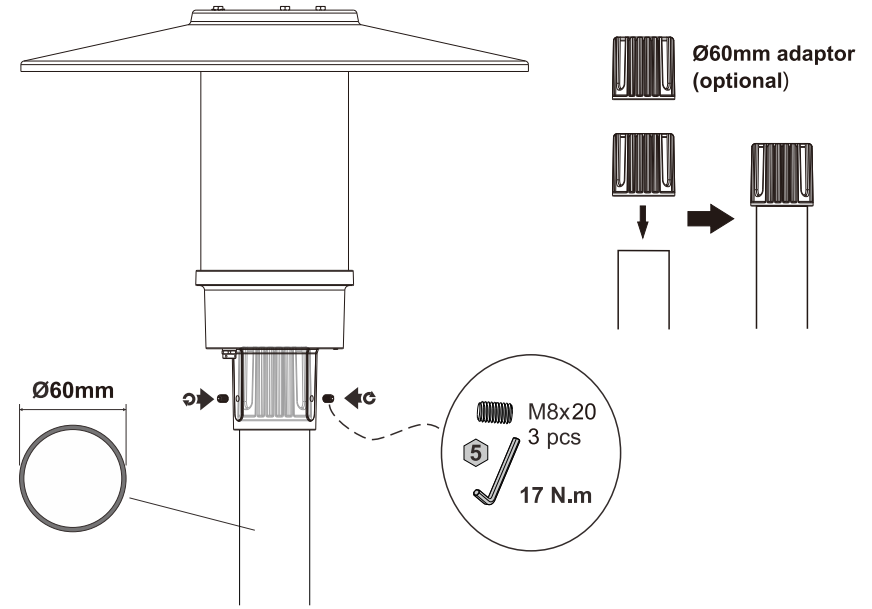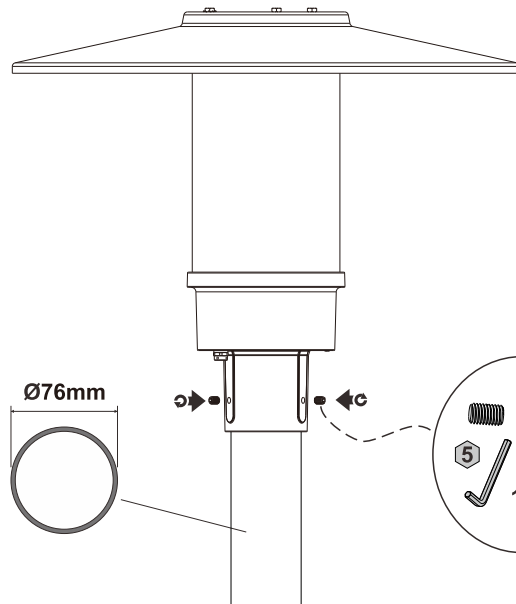

Caution: Any operation on LED module is forbidden while power-on.
Zur Vermeidung von Risiken müssen defekte Leitungen ausschließlich vom Hersteller, Inverkehrbringer oder Fachmann ausgetauscht werden.
Achtung: In Betrieb ist keine Arbeit am LED-Modul erlaubt.



For non-user replaceable light sources:
The light source contained in this luminaire shall only be replaced by the manufacturer or his service agent or a similar qualified person.
Das Leuchtmittel dieser Leuchte ist nicht austauschbar. Wenn das Leuchtmittel das Ende seiner Lebensdauer erreicht hat, muss die gesamte Leuchte ersetzt werden.



For use in environments where normal non-conductive/conductive dust accumulation may be expected, not for use in environments with expected high/unusual dust accumulation.



Data subject to change
Les données sont sujettes à modifications
Änderungen vorbehalten

Opplé Lighting Electronic (Zhongshan) Co., Ltd.
Building A, No.275 Dongan Bei Road, Haizhou District,
Guzhen Town, Zhongshan City, Guangdong Province, P.R.China

Opplé Lighting B.V.
Meerenakkerweg 1-07
5652 AR Eindhoven
The Netherlands
service@opple.com
www.opple.com