

LED Post Top

Item
Code

CCT





708000005300	3000K	7.85kg
708000003800	3000K	7.83kg
708000003900	3000K	7.85kg
708000004000	3000K	7.83kg
708000005200	4000K	7.85kg
708000004100	4000K	7.83kg
708000004200	4000K	7.85kg
708000004300	4000K	7.83kg

Item
Code

CCT




708000004400	3000K	7.86kg
708000004500	3000K	7.84kg
708000004600	3000K	7.86kg
708000004700	3000K	7.84kg
708000004800	4000K	7.86kg
708000004900	4000K	7.84kg
708000005000	4000K	7.86kg
708000005100	4000K	7.84kg

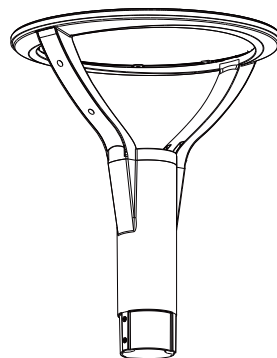

Model Name	Diameter (mm)	Ø (mm)	H (mm)	Rated Voltage(V~)	Frequency (Hz)	Power Factor	Current (A)	Rated Power(W)
LED PT-P 33W-DALI-730-AS	60	450	565	220-240	50/60	0.9	0.151	33
LED PT-P 33W-DALI-730-AS-D76	76							
LED PT-P 33W-DALI-730-W	60							
LED PT-P 33W-DALI-730-W-D76	76							
LED PT-P 33W-DALI-740-AS	60							
LED PT-P 33W-DALI-740-AS-D76	76							
LED PT-P 33W-DALI-740-W	60							
LED PT-P 33W-DALI-740-W-D76	76							
LED PT-P 50W-DALI-730-AS	60						0.225	50
LED PT-P 50W-DALI-730-AS-D76	76							
LED PT-P 50W-DALI-730-W	60							
LED PT-P 50W-DALI-730-W-D76	76							
LED PT-P 50W-DALI-740-AS	60							
LED PT-P 50W-DALI-740-AS-D76	76							
LED PT-P 50W-DALI-740-W	60							
LED PT-P 50W-DALI-740-W-D76	76							


Installation


①

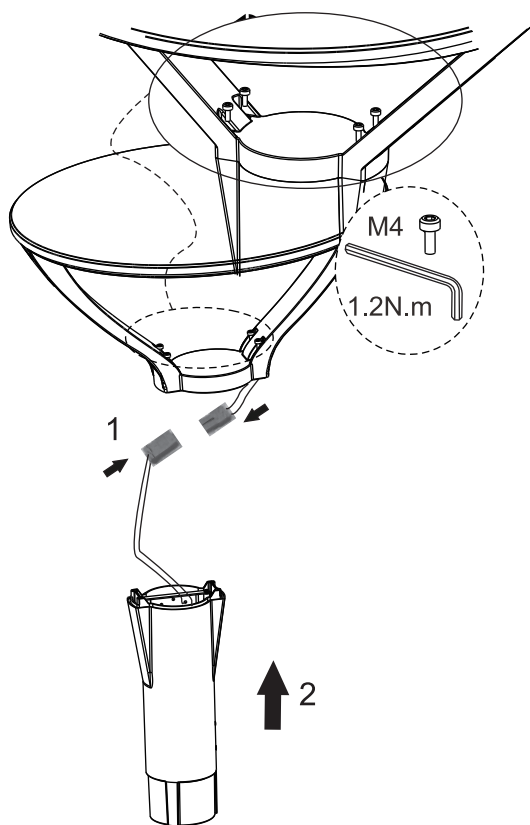

Application height: 3m - 6m

②

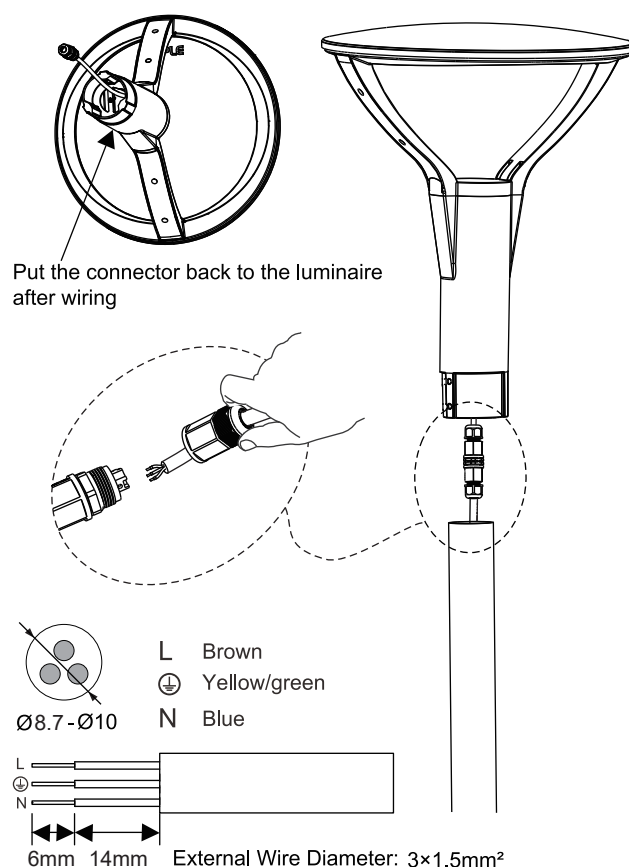

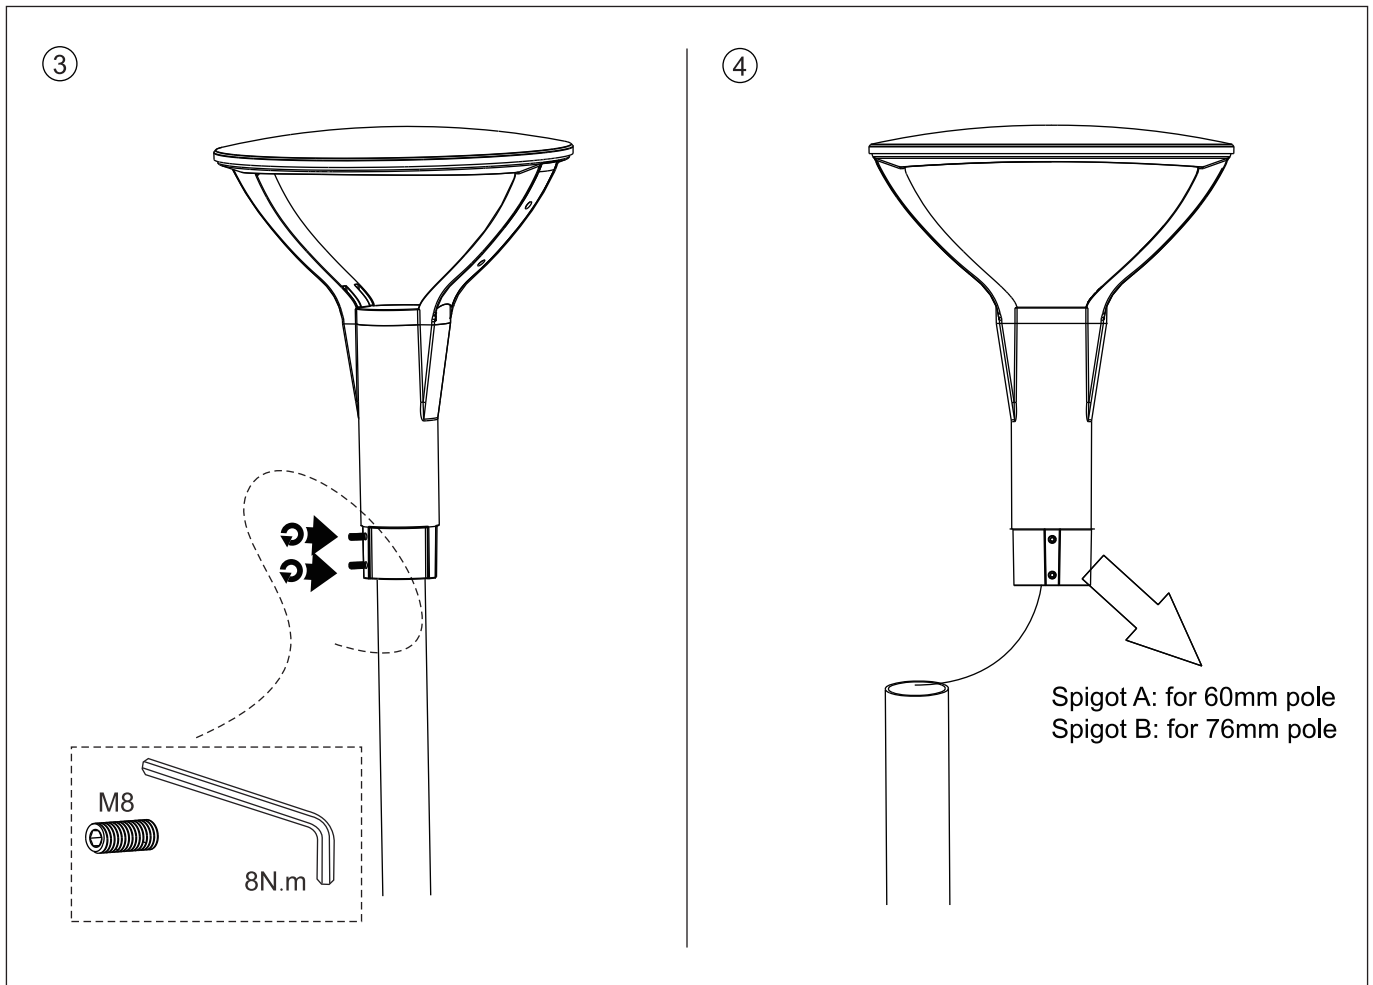





Caution: Any operation on LED module is forbidden while power-on.
Zur Vermeidung von Risiken müssen defekte Leitungen ausschließlich vom Hersteller, Inverkehrbringer oder Fachmann ausgetauscht werden.
Achtung: In Betrieb ist keine Arbeit am LED-Modul erlaubt.



For non-user replaceable light sources:
The light source contained in this luminaire shall only be replaced by the manufacturer or his service agent or a similar qualified person.
Das Leuchtmittel dieser Leuchte ist nicht austauschbar. Wenn das Leuchtmittel das Ende seiner Lebensdauer erreicht hat, muss die gesamte Leuchte ersetzt werden.



For use in environments where normal non-conductive/conductive dust accumulation may be expected, not for use in environments with expected high/unusual dust accumulation.



Data subject to change
Les données sont sujettes à modifications
Änderungen vorbehalten

Opplé Lighting Electronic (Zhongshan) Co., Ltd.
Building A, No.275 Dongan Bei Road, Haizhou District,
Guzhen Town, Zhongshan City, Guangdong, China.

OPPLE Lighting B.V.
Meerenakkerweg 1.11
5652 AR Eindhoven
The Netherlands
service@opple.com
www.opple.com