


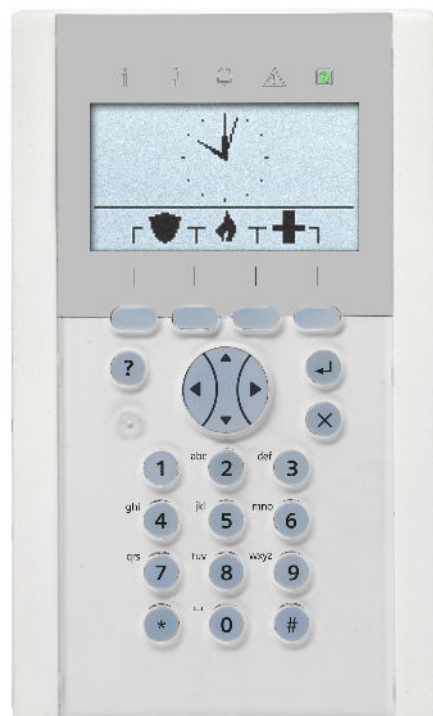

Acre intrusion LCD keypad with graphical display/card reader and audio

Acre's SPCK620/SPCK623 keypad provides a simple intuitive interface to the acre intrusion system. Optimised for multi area systems the keypad provides a detailed overview of system status.

Key features

- **Powerful menu structure**

The LCD display, soft keys, and multi-dimensional navigation key is ideal to operate large systems or single areas in a user friendly way. Cause and effect intergration

- **Intergrated Card reader (SPCK623 only)**

Can be used for authorisation without code for ease of access or with code for higher security.

- **Easy configuration**

Can be configured from the keypad or acre intrusion Web interface. The comfort keypad is ideal to operate single and multi-area applications in a user friendly way. The soft keys and the multi-dimensional navigation key provide an easy to use system with minimum operational steps. Customer logo, emergency or quick set functions can be displayed in idle state.

Keypad operations

- Full Engineer menus
- Users menus
- Area groups
- System Status
- Mapping gate control
- Add/Edit/Delete Users
- SMS setup
- View logs
- Multi Language
- Door control



Technical Data

Functional

LED Indicators	5 status LEDs
Special keys	4 soft keys, 1 multi-dimensional navigation key

Intrusion

Interfaces	X-BUS (in, out)
------------	-----------------

Power and mechanical

Dimensions	112 x 185 x 28 mm
Operating current	Max. 155 mA at 12 V DC (backlight, LEDs, sounder operated)
Operating temperature	5° ~ +40 °C
Operating voltage	9.5 ~ 14 V DC
Quiescent current	Max. 55 mA at 12 V DC
Tamper contact	Front/back spring tamper

General

Colour	RAL 9003 (signal white)
Display	128 x 64 pixels (approx. 6 x 20 characters)
Weight	0.380 kg



SPCK620.100-N Comfort KP, Neutr.

Acre intrusion Comfort Keypad

Ordering Data

Type	Art. No.	Description	Weight*
Keypad	V54543-F110-A100	SPCK620.100 Comfort Keypad	0.380 kg
Keypad	V54543-F111-A100	SPCK623.100 Comfort Keypad w. Reader / Audio	0.380 kg
SPCY620	V54543-Z150-A100	Flush mount Kit	

* Total weight of the product inclusive of the weight of its accessories and packaging.

Additional Ordering Data

Acre intrusion Panels

Type	Art. No.	Description
SPC6350.320-L1	V54541-C118-A100	Acre intrusion control panel, 16-512 zones, Ethernet, G5 metal housing
SPC6330.320-L1	V54541-C105-C100	Acre intrusion control panel, 8-512 zones, Ethernet, G3 metal housing
SPC5350.320-L1	V54541-C117-A100	Acre intrusion control panel, 16-128 zones, Ethernet, G5 metal housing
SPC5330.320-L1	V54541-C107-B100	Acre intrusion control panel, 8-128 zones, Ethernet, G3 metal housing
SPC5320.320-L1	V54541-C106-B100	Acre intrusion control panel, 8-128 zones, Ethernet, G2 metal housing
SPC4320.320-L1	V54541-C109-B100	Acre intrusion control panel, 8-32 zones, Ethernet, G2 metal housing
SPC4320.220-L1	V54541-C114-A100	Acre intrusion control panel, 8-32 zones, Ethernet, G2 housing with metal base and plastic cover

Keypads

Type	Art. No.	Description
SPCK520.100-N	V54543-F115-A100	Compact Keypad with graphical display and audio
SPCK521.100-N	V54543-F116-A100	Compact Keypad with graphical display, card reader and audio
SPCK620.100	V54543-F110-A100	LCD keypad with graphical display
SPCK623.100	V54543-F111-A100	LCD keypad with graphical display, card reader and audio
SPCK420.100	V54543-F101-A100	LCD keypad with 2 x 16 characters
SPCK421.100	V54543-F102-A100	LCD keypad with 2 x 16 characters and integrated card reader

Detectors

Type	Art. No.	Description
PDM-I12	V54530-F114-A100	MAGIC PIR detector, 12m wide angle
PDM-I18	V54530-F106-A100	MAGIC PIR detector, 18 m wide angle
MK-1400	V54536-F101-A100	Magnetic contact

Accessories

Type	Art. No.	Description
IPAW8-10	V54538-F107-A100	Wireless personal alarm
IRCW6-11	V54543-F109-A100	SiWay remote control, white replaceable battery

Expanders

Type	Art. No.	Description
SPCE452.100	V54542-F107-A100	Expander with 8 outputs, back tamper
SPCE652.100	V54542-F106-A100	Expander with 8 inputs and 2 outputs, back tamper
SPCA210.100	V54547-A101-A100	2-door expander
SPCP432.300	V54545-C103-A100	Smart PSU with 2-door expander, G2-housing
SPCP433.300	V54545-C104-A100	Smart PSU with 2-door expander, G3-housing
SPCE110.100	V54542-F104-A100	Keyswitch expander with 2 LEDs and 3-position key switch
SPCE120.100	V54542-F105-A100	Indication expander with 16 LEDs, 4 function keys and integrated card reader
SPCW130.100	V54554-F101-B100	SiWay RF-expander
SPCP332.300	V54545-C102-A100	Smart PSU with 8 inputs and 2 outputs, G2-housing
SPCP333.300	S54545-C101-A100	Smart PSU with 8 inputs and 2 outputs, G3-housing
SPCP355.300	S54545-C105-A100	Smart PSU with 8 inputs and 6 outputs, G5 metal housing

Verification

Type	Art. No.	Description
SPCV340.000	V54542-F108-B100	Audio expander with 4 inputs and 1 output
SPCV341.000	V54542-F109-B100	Audio expander with 4 inputs and 1 line output
SPCV310.000	V54542-F120-A100	Audio satellite
SPCV440.000	V54542-F118-A100	Combi audio expander for MAGIC motion detectors with 4 inputs and 1 output
SPCV410.000	V54542-F119-A100	Combi audio satellite for MAGIC motion detectors
CCMS2010-IR	S54561-C112-A100	1/2.7" 2MP Compact IP Camera PoE(LAN)

Access

Type	Art. No.	Description
AR6181-MX	6FL7170-8BK	Multi-technology card reader
PP500-EM	V54501-F1-A1	Heavy-duty card and PIN reader
AR6182-RX	6FL7170-8AE	Multi-technology card and PIN reader